



**PROFESSIONAL
OUTDOOR LIGHTING**

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL 1433 Architectural Series • Bollards & Beacons

FIXTURE SPECIFICATIONS:

LAMP TYPE:

ED-17- Metal Halide or High Pressure Sodium. 70WMax. Ballast is integrated into fixture. Please specify ballast type from the fixture ordering information chart. Lamp not included with fixture, order separately.

HOUSING:

Die-cast, copper-free aluminum.

POST:

5" diameter, heavy gauge, extruded aluminum (1/8" wall thickness).

FINISH:

Durable powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

SOCKET/LAMP HOLDER:

Compact fluorescent thermoplastic socket.

BALLAST:

High-power factor ballast rated for -20°F starting, 120-volt standard.

LENS:

Clear, frosted or prismatic threaded and gasketed, tempered glass vapor globe.

MOUNTING:

Aluminum mounting base and foundation anchor rods included.

FASTENERS:

All fasteners are stainless steel.

WIRING:


Prewired with 200°C-rated wire along with a grounded lead.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

DIMENSIONS:

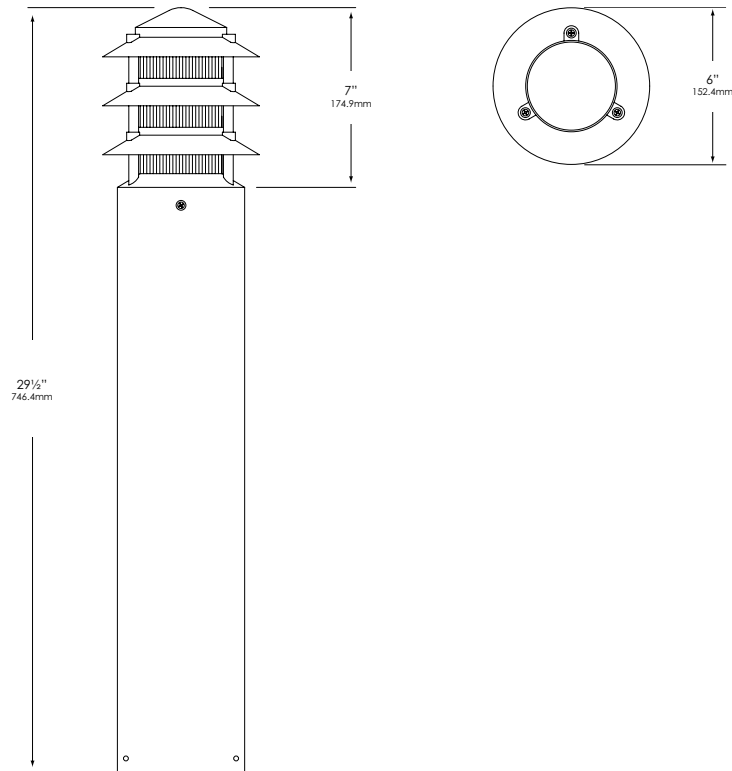

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 1433 Architectural Series • Bollards & Beacons

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: 1433-B-FR-35-MH-120

MODEL	FINISH	LENS	INTEGRATED HID BALLAST			
			Wattage	Ballast	Voltage	
1433	Standard	CR – Clear lens FR – Frosted lens PR – Prismatic lens	35* 50 70	MH – Metal Halide	120 208 240 277 MT – Multi-Tap	
	B – Black					
	Z – Architectural Bronze					
	DZ – Dark Bronze					
	GT – Granite					
	W – White					
	Premium		BR – Architectural Brick LZ – Light Bronze SB – Special Bronze GG – Glossy Gray R – Rust HG – Hunter Green WB – Weathered Bronze WI – Weathered Iron GM – Graphite Metallic	35 50 70	HPS – High Pressure Sodium	120 208 240 277 MT – Multi-Tap
	BR – Architectural Brick					
	LZ – Light Bronze					
	SB – Special Bronze					
GG – Glossy Gray						
Hand Finished	G – Verde P – Pewter M – Mocha OF – Olde Finish	35 50 70	HPS – High Pressure Sodium	120 208 240 277 MT – Multi-Tap		
G – Verde						
P – Pewter						
M – Mocha	G – Verde P – Pewter M – Mocha OF – Olde Finish	35 50 70	HPS – High Pressure Sodium	120 208 240 277 MT – Multi-Tap		
OF – Olde Finish						

Lamp not included with fixture, order separately. - For available lamps, see Lamp Guide, Vista catalog.

*35-watt MH ballasts available in 120 or 277 volts only.