



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 1504 Architectural Series • Step Lights • LED

FIXTURE SPECIFICATIONS:

HOUSING:

Compression-molded fiber-reinforced polymer. High-strength, heat resistant and UV stable. Molded in threaded brass inserts.

DOOR COVER:

Door cover available in choice of four different materials and five styles - Glass Border, Stainless Border, Stainless Louver 2, Brass Border, and Brass Louver 2.

FINISH:

Metal Door Cover: Stainless Steel, Natural Brass, and Olde Brass.
Glass Border: Black (Standard).

OPTICS/AIMING:

No-glare, sharp cut-off LED optics.

LAMP TYPE:

Six high output LED emitters, powered for high efficiency. Modular performance optic package.

REFLECTOR:

Individual, highly specular reflector.

ELECTRICAL:

Constant current Class 2 output driver with universal voltage input (120-277VAC) Suitable for through branch wiring. Four 1/2" NPT conduit entry hubs with knockout membrane standard.

DRIVER:

Integral CUL listed LED driver, either non-dimmable **ND** or dimmable. Dimming: 0-10V **010** and Phase Cut TRIAC (120V only) **PCT** options available.

MOUNTING:

Rough-in box designed for installation in concrete, brick/block, wood frame construction (non-IC) and insulated walls (IC).

FASTENERS/INSERTS:


All fasteners are stainless steel.

CERTIFICATION:

UL Listed to U.S. & Canadian safety standards for line voltage landscape luminaires (UL 1598). Suitable for wet locations. *IP66*

All Vista Architectural luminaires are [MADE IN THE U.S.A.](#)

DIMENSIONS:

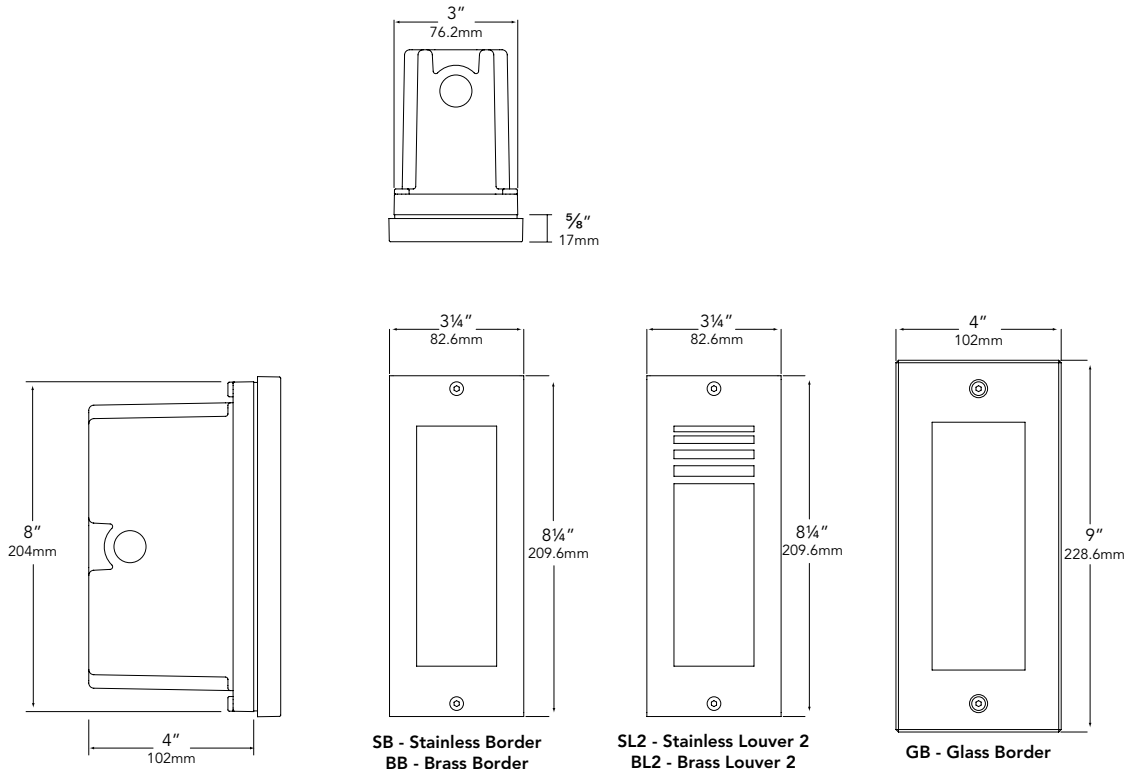

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 1504 Architectural Series • Step Lights • LED

LAMP SPECIFICATIONS:

LED

- High output LED, powered for high efficiency
- Modular performance optic package
- 10.3 Watts
- 506 Deliverable Lumens

OPTICS / AIMING

- No-glare
- Sharp cut-off

ELECTRICAL

- Constant current Class 2 output driver
- Universal voltage input (120-277VAC)
- Suitable for through branch wiring
- Four ½" NPT conduit entry hubs with knockout membrane standard
- Dimming: 0-10V 010 and Phase Cut TRIAC (120V only) PCT options available.

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: 1504-GB-B-W-MV-PCT-CP-ER-1504-1

MODEL	DOOR COVER	FINISH	COLOR TEMP	VOLTAGE	DIMMING	HOUSING (Rough-in Box)	ACCESSORIES
1504	SB - Stainless Border SL2 - Stainless Gradient BB - Brass Border BL2 - Brass Gradient GB - Glass Border	Metal Door Cover SS - Stainless Steel BSN - Natural Brass BSO - Olde Brass Glass Border Door Cover B - Black (Standard) Custom Color: (Consult Factory for Lead Time)	27 - 2700°K 30 - 3000°K 35 - 3500°K 40 - 4000°K	MV - Multi Volt	ND - Non Dimming 010 - 0 -10V PCT - Phase Cut TRIAC (120V only)	CP - Composite	ER-1504-1 (1 Extension Ring) ER-1504-2 (2 Extension Rings) ER-1504-3 (3 Extension Rings) FT - Flush Tray

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.