



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 2216-BSO Landscape Series • Brass & Copper • Up & Accent Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, brass.

SHROUD:

Die-cast, brass fitted to housing with dual silicone O-ring gaskets – providing a superior weather-tight seal.

FINISH:

Olde Brass

SOCKET/LAMP HOLDER:

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

LENS:

Clear or frosted convex glass lens. Optical effect lenses are available; see accessories column on fixture ordering information chart.

LAMP TYPE:

MR-16 LED Lamp Only - 36° Flood, 4.5W is standard.

OPTICS:

Available in 15° Narrow Spot, 25° Spot, 36° Flood, or 60° Wide Flood distributions.

MOUNTING:

Die-cast brass adjustable knuckle with 1/2" NPS thread. Fixture may be mounted into threaded hubs in junction boxes, ground stakes (GR), tree mount boxes (TR), or mounting canopies (WR).

FASTENERS:



All fasteners are stainless steel.

WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

Designed and Assembled **IN THE U.S.A.**

DIMENSIONS:

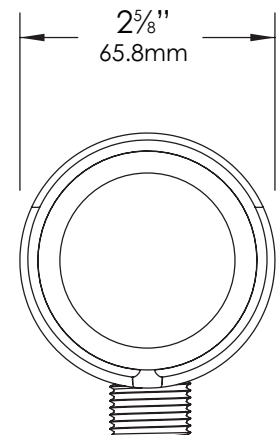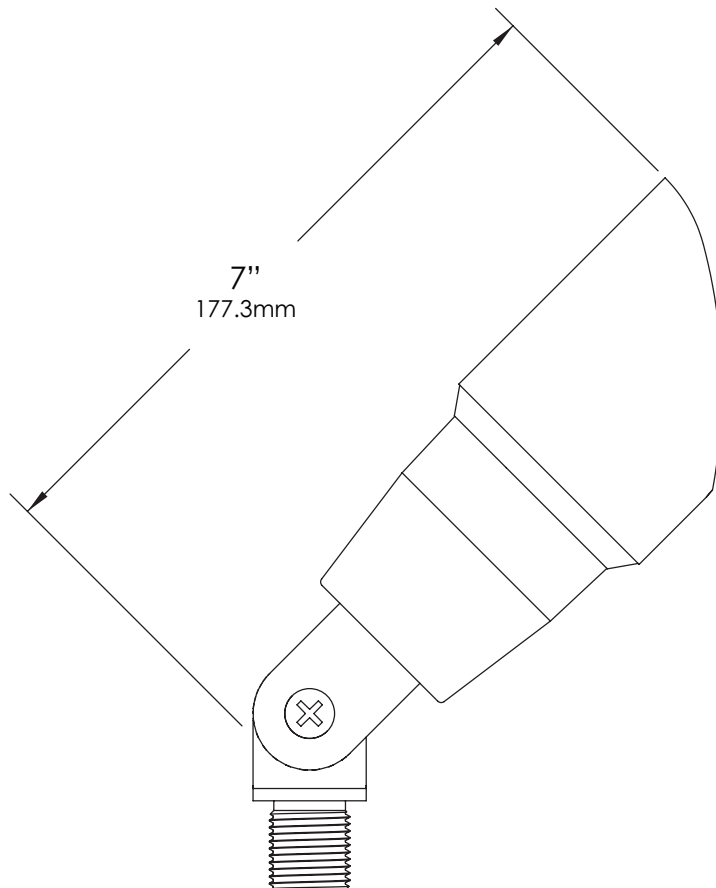

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 2216-BSO Landscape Series • Brass & Copper • Up & Accent Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: GR-2216-BSO-4.5-W-25-CFR

MOUNTING	MODEL	FINISH	WATTAGE	COLOR TEMP	DISTRIBUTION	ACCESSORIES
GR - ABS ground stake WR - Wall-mount canopy TR - Tree-mount junction box	2216	BSO - Olde Brass	4.5 5.5	W - Warm	15 -15° Narrow Spot 25 - 25° Spot 36 - 36° Flood 60 - 60° Wide Flood	BL – Flat Cool Blue lens SL – Flat Spread lens CFR – Crowned Frosted lens LSL - Linear Spread Lens DBL – Flat Dark Blue lens GL – Flat Dark Green lens RL – Flat Red lens YL – Flat Amber lens HL – Honeycomb louver 5 - 5' Wire Lead
						NOTE: * If fixture to be used with Extended Arm Mount (EAM) - <u>must order</u> with extended wire length

Fixtures shipped with standard lamp, unless otherwise specified.
 Fixtures shipped with specified mounting hardware.