



**PROFESSIONAL
OUTDOOR LIGHTING**

Type:

Model:

Project:

SPECIFICATION SHEET

MODEL 5006 Landscape Series • Up & Accent Lights

FIXTURE SPECIFICATIONS:

HOUSING:

Die-cast, copper-free aluminum.

SCREWLESS LOCKING SHROUD:

Die-cast, copper-free aluminum fitted to housing with a silicone O-ring gasket for superior weather-tight seal secured to the housing by a secondary locking ring.

FINISH:

Durable powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request

LENS:

Clear, tempered, shock and heat-resistant, soda-lime glass lens.

LAMP TYPE:

MR-16 LED Lamp Only - 36° Flood, 4.5W is standard.

Optics:

Available in 15° Narrow Spot, 25° Spot, 36° Flood, or 60° Wide Flood distributions.

MOUNTING:

Injection-molded composite adjustable knuckle with 1/2" NPS stem. Fixture may be mounted into threaded hubs in junction boxes, ground

stakes (GR), tree mount boxes (TR), or mounting canopies (WR).

FASTENERS:


All fasteners are stainless steel.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors for a secure connection to supply cable.

All Vista luminaires are **MADE IN U.S.A.**

DIMENSIONS:

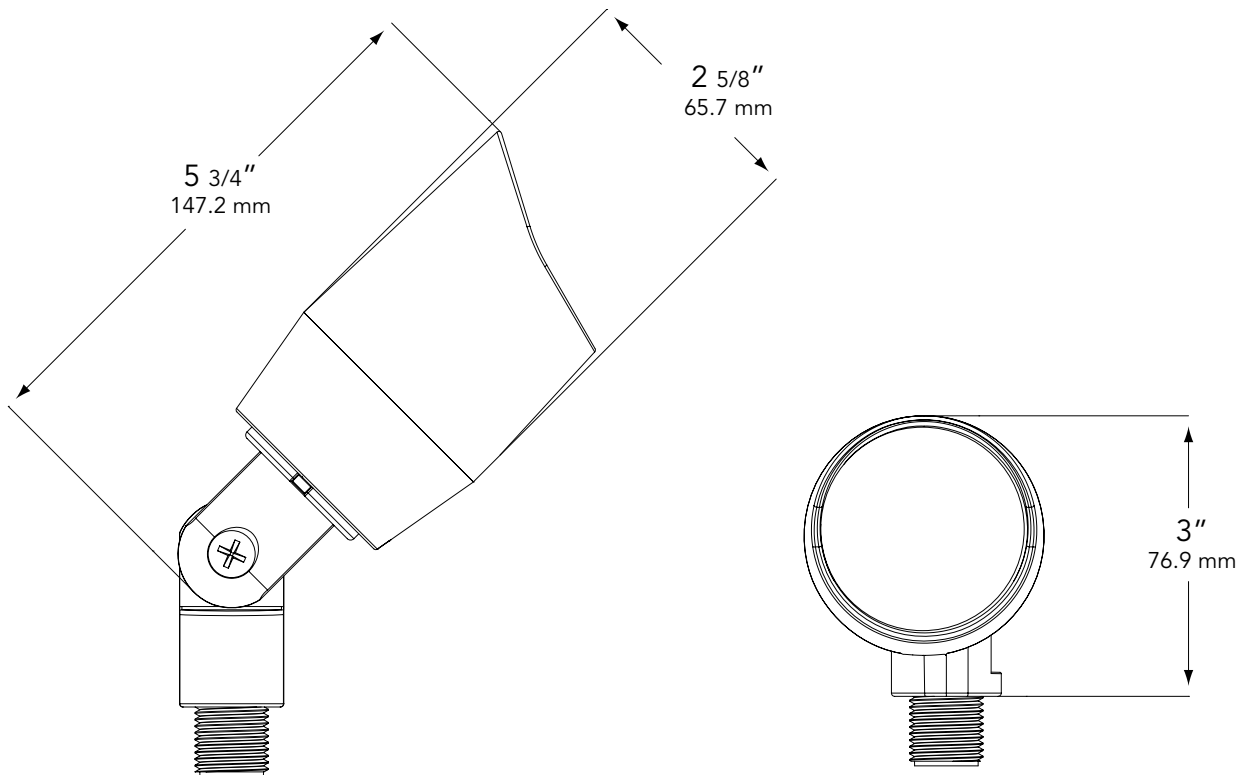

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 5006 Landscape Series • Up & Accent Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: GR-5006-B-4.5-W-25-SL

| MOUNTING | MODEL | FINISH | WATTAGE | COLOR TEMP | DISTRIBUTION | ACCESSORIES |
|---------------------------------------------------------------------------------------------------|-------|--------------------------|---------|------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GR- ABS ground stake WR- Wall-mount canopy TR- Tree-mount junction box | 5006 | Standard | 4.5 | W - Warm | 15-15° Narrow Spot 25- 25° Spot 36- 36° Flood 60- 60° Wide Flood | FR - Frosted Lens BL - Flat Cool Blue Lens SL - Flat Spread Lens DBL - Flat Dark Blue Lens GL - Flat Dark Green Lens RL - Flat Red Lens YL - Flat Amber Lens HL - Honeycomb Louver 5 - 5' Wire Lead |
| | | B - Black | 5.5 | | | |
| | | Z - Architectural Bronze | | | | |
| | | DZ - Dark Bronze | | | | |
| | | GT - Granite | | | | |
| | | W - White | | | | |
| | | Premium | | | | |
| | | BR - Architectural Brick | | | | |
| | | LZ - Light Bronze | | | | |
| | | SB - Special Bronze | | | | |
| GG - Glossy Gray | | | | | | |
| R - Rust | | | | | | |
| HG - Hunter Green | | | | | | |
| WB - Weathered Bronze | | | | | | |
| WI - Weathered Iron | | | | | | |
| GM - Graphite Metallic | | | | | | |
| Hand Finished | | | | | | |
| G - Verde | | | | | | |
| P - Pewter | | | | | | |
| M - Mocha | | | | | | |
| OF - Olde Finish | | | | | | |

NOTE:
 * If fixture to be used with Extended Arm Mount (EAM) - must order with extended wire length

Fixtures shipped with standard lamp, unless otherwise specified.
 Fixtures shipped with specified mounting hardware.