

TYPE:	MODEL:
PROJECT:	

PRODUCT FEATURES

ORDERING INFORMATION

Wattage	75 W maximum
Voltage	120 VAC
Lamp Туре	PAR30 compatible (lamp not included)
Dimensions	51⁄%" DIA x [7" 9¾" 12¾"] D

EXAMPLE: 1093-B-CX-N-120-HL

MODEL	FINISH	LENS	SHROUD	INPUT VOLTAGE	ACCESSORIES
1093				120	

MODEL	FINISH	LENS	SHROUD	INPUT VOLTAGE	ACCESSORIES
1093	B Black	CX Crowned Clear Lens	N No shroud	120 120 VAC	HL Honeycomb Louver
	Z Architectural Bronze	CBL Crowned Cool Blue Lens	M Medium Shroud		
	DZ Dark Bronze	CFR Crowned Frosted Lens	L Long Shroud		
	GT Granite				
	W White				
	BR Architectural Brick				
	LZ Light Bronze				
	SB Special Bronze				
	GG Glossy Gray				
	R Rust				ORDERING NOTES
	HG Hunter Green				Fixture shipped with no lamp
	WB Weathered Bronze				
	WI Weathered Iron				
	GM Graphite Metallic				
	G Verde				
	P Pewter				
	M Mocha				
	OF Olde Finish				



www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478) 1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)



SPECIFICATIONS

LAMP TYPE:

PAR30 compatible. Lamp not included.

HOUSING:

Injection-molded, glass-reinforced Ryton® R-4 polymer composite. Housing aimable utilizing Vista's patented Infinity Knuckle.

SHROUD:

Injection-molded, glass-reinforced Ryton ${}^{\rm TM}$ R4 composite fitted to the housing with a molded gasket.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

LAMP HOLDER:

Porcelain medium base 4KV pulse rated socket with spring center contact and silicone rubber jacket protector.

LENS:

Clear, tempered, shock & heat resistant, soda-lime glass lens - crowned (convex) to promote water runoff. Optical effect lenses are available.

WIRING:

Prewired with 150° C-rated wire.

DIMENSIONS

MOUNTING:

Infinity Knuckle – Die-cast, copper-free aluminum, stainless steel stem with $\frac{1}{2}$ " NPT thread. A fully sealed spherical grommet allows for precise aiming and retention.


FASTENERS/INSERTS:

All fasteners are stainless steel

CERTIFICATION:

c ULus wet location listed (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. & Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

Ingress Protection Rating: IP65

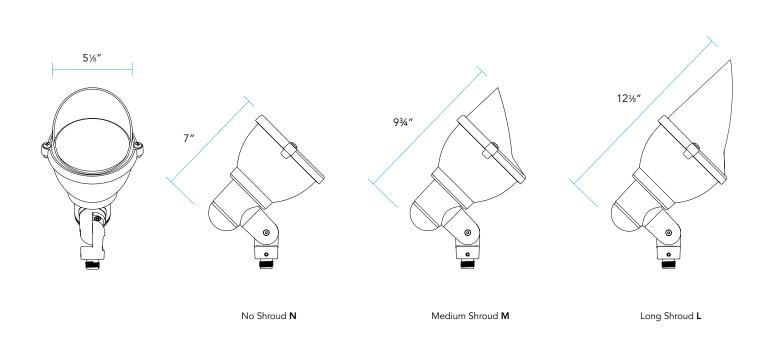



PROFESSIONAL

OUTDOOR LIGHTING

www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478)

1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)