



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

# SPECIFICATION SHEET

## MODEL 1115 Architectural Series • Inground & Well Lights

### FIXTURE SPECIFICATIONS:

**LAMP TYPE:**

MR-16 - Halogen - 75W Max.

Electronic 12V transformer is integrated into fixture. Please specify transformer primary voltage in fixture ordering information chart. Lamp not included with fixture, order separately.

**HOUSING:**

Compression-molded, glass-reinforced polymer for strength and high UV stability – warranted for ten years against corrosion.

**LENS COVER:**

Injection-molded, glass-reinforced Ryton™ R4 composite fitted to housing with a C-curved cross-section gasket– surrounding edge of lens to provide a superior dual weather-tight seal. Lens cover is also available in precision CNC-machined solid stainless steel.

**FINISH:**

Durable powder coat finish available in Black, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

Housing available in black only.

**SOCKET/LAMP HOLDER:**

Top grade American-made ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

**TRANSFORMER:**

High-power factor moisture and shock resistant electronic transformer with short circuit and overload protection as well as soft start circuitry to maximize lamp life.

**LENS:**

Clear, tempered, shock and heat resistant, soda-lime glass lens.

**OPTICS/AIMING:**

Adjustable lamp bracket provides up to ±45° with 360° of rotation as well as two inches of variable lamp height adjustment for precise beam control. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping.

**MOUNTING:**

In-grade. Wire compartment has two ¾" NPT conduit entries for through wiring as well as a silicone rubber gasketed cover for a completely waterproof wiring compartment (Optional pre-tapped side conduit entries are available – consult factory for details). Potting compound for wiring compartment supplied with fixture. Housing design allows for direct concrete mounting with no concrete mounting kit required.

**FASTENERS/INSERTS:**

All fasteners are stainless steel and brass.

**WIRING:**



Prewired with 200°C-rated wire along with a grounded lead.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards. This luminaire has an ingress protection rating of IP67 for protection against detrimental dust intrusion as well as penetration of water under submersion. Drive-over rated for 3,000 lb.

All Vista luminaires are **MADE IN U.S.A.**

### DIMENSIONS:

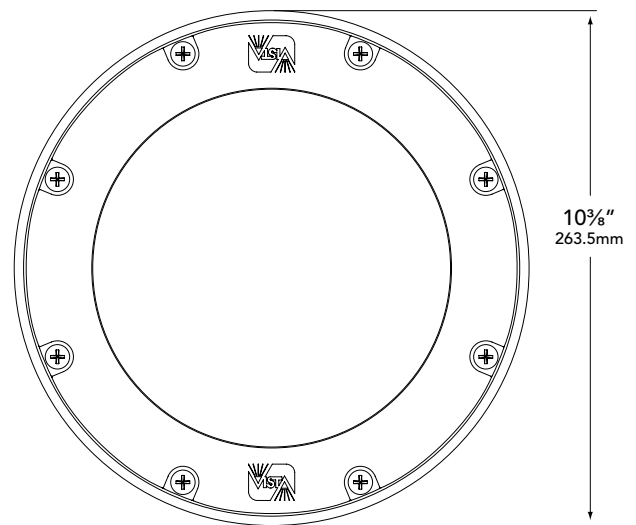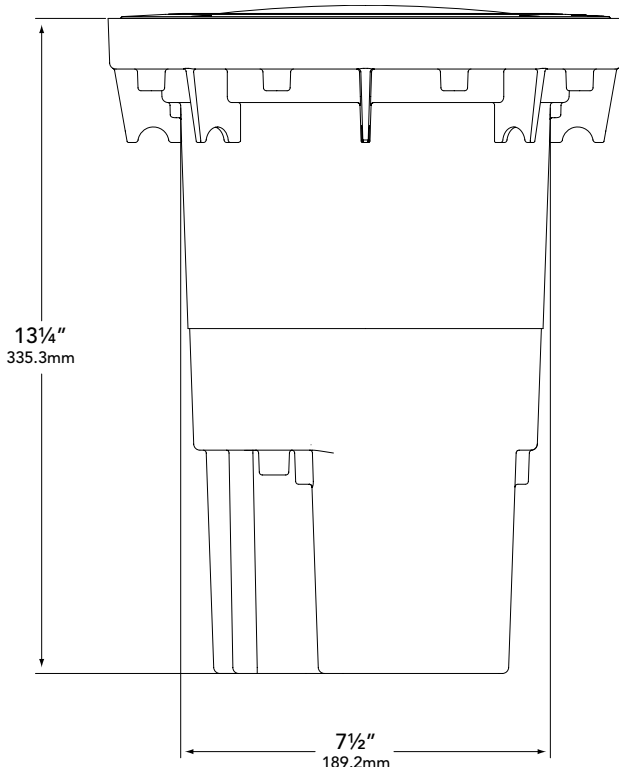

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# SPECIFICATION SHEET

## MODEL 1115 Architectural Series • Inground & Well Lights

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: 1115-B-CFC-120-HL**

MODEL	FINISH	LENS	TRANSFORMER INPUT VOLOTAGE	ACCESSORIES
1115	Standard	CFC - Crowned Frosted Lens w/Clear Circle CFO - Crowned Frosted Lens w/Clear Oval CFR - Crowned Frosted Lens CBL - Crowned Cool Blue Lens	120 277	HL - Honeycomb Louver
	B - Black			
	DZ - Dark Bronze			
	GT - Granite			
	W - White			
	Premium			
	BR - Architectural Brick			
	LZ - Light Bronze			
	SB - Special Bronze			
	GG - Glossy Gray			
R - Rust				
HG - Hunter Green				
WB - Weathered Bronze				
WI - Weathered Iron				
GM - Graphite Metallic				
Hand Finished				
G - Verde				
P - Pewter				
M - Mocha				
OF - Olde Finish				

Lamp not included with fixture, order separately - For available lamps, see Lamp Guide - Vista catalog.