



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type:

Model:

Project:

# SPECIFICATION SHEET

## MODEL 1504 Architectural Series • Step Lights • LED

### FIXTURE SPECIFICATIONS:

**HOUSING:**

Compression-molded fiber-reinforced polymer. High-strength, heat resistant and UV stable. Molded in threaded brass inserts.

**DOOR COVER:**

Door cover available in choice of four different materials and five styles - Glass Border, Stainless Border, Stainless Louver 2, Brass Border, and Brass Louver 2.

**FINISH:**

Metal Door Cover: Stainless Steel, Natural Brass, and Olde Brass.

Glass Border: Black (Standard).

**OPTICS/AIMING:**

No-glare, sharp cut-off LED optics.

**LAMP TYPE:**

Six high output LED emitters, powered for high efficiency. Modular performance optic package.

**REFLECTOR:**

Individual, highly specular reflector.

**ELECTRICAL:**

Constant current Class 2 output driver with universal voltage input (120-277VAC) Suitable for through branch wiring. Four 1/2" NPT conduit entry hubs with knockout membrane standard.

**DRIVER:**

Integral CUL listed LED driver, either non-dimmable **ND** or dimmable. Dimming: 0-10V **010** and Phase Cut TRIAC (120V only) **PCT** options available.

**MOUNTING:**

Rough-in box designed for installation in concrete, brick/block, wood frame construction (non-IC) and insulated walls (IC).

**FASTENERS/INSERTS:**


All fasteners are stainless steel.

**CERTIFICATION:**

UL Listed to U.S. & Canadian safety standards for line voltage landscape luminaires (UL 1598). Suitable for wet locations. *IP66*

**All Vista Architectural luminaires are [MADE IN THE U.S.A.](#)**

### DIMENSIONS:

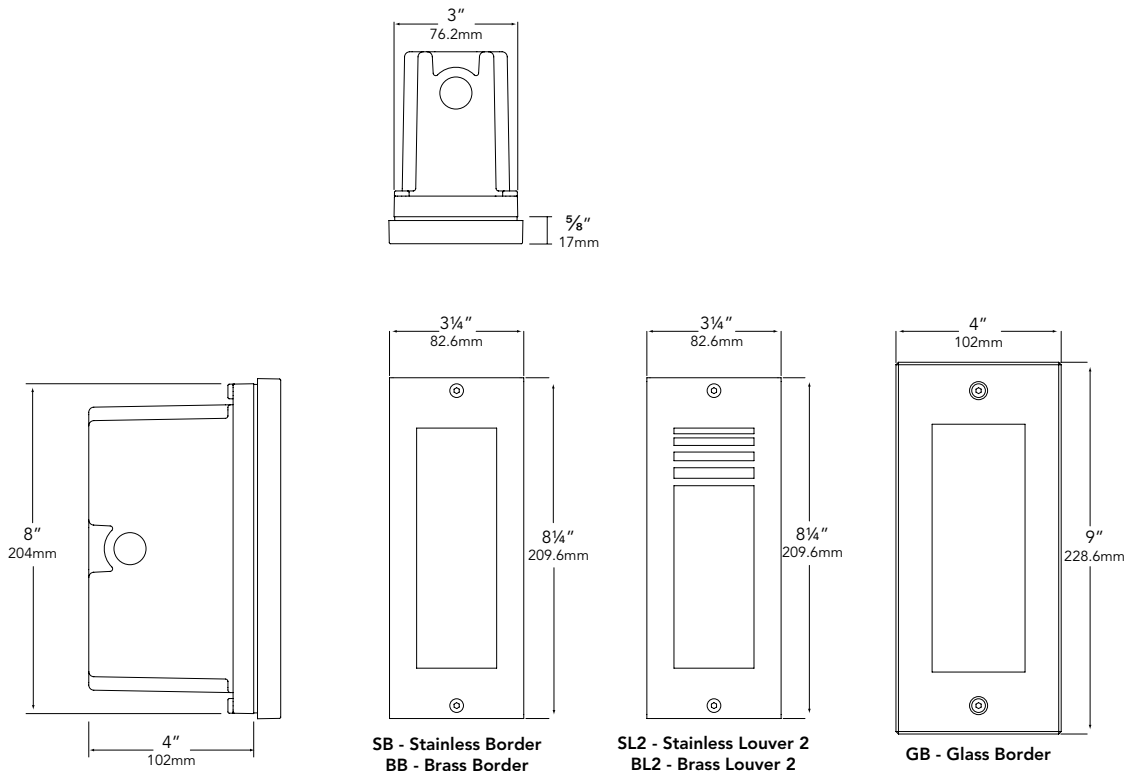

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# SPECIFICATION SHEET

## MODEL 1504 Architectural Series • Step Lights • LED

### LAMP SPECIFICATIONS:

#### LED

- High output LED, powered for high efficiency
- Modular performance optic package
- 10.3 Watts
- 506 Deliverable Lumens

#### CRI

- The CRI is 81

#### OPTICS / AIMING

- No-glare
- Sharp cut-off

#### ELECTRICAL

- Constant current Class 2 output driver
- Universal voltage input (120-277VAC)
- Suitable for through branch wiring
- Four ½" NPT conduit entry hubs with knockout membrane standard
- Dimming: 0-10V 010 and Phase Cut TRIAC (120V only) PCT options available.

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: 1504-GB-B-W-MV-PCT-CP-ER-1504-1**

MODEL	DOOR COVER	FINISH	COLOR TEMP	VOLTAGE	DIMMING	HOUSING (Rough-in Box)	ACCESSORIES
1504	<b>SB</b> - Stainless Border <b>SL2</b> - Stainless Gradient <b>BB</b> - Brass Border <b>BL2</b> - Brass Gradient <b>GB</b> - Glass Border	<b>Metal Door Cover</b> SS - Stainless Steel BSN - Natural Brass BSO - Olde Brass  <b>Glass Border Door Cover</b> B - Black (Standard)  Custom Color: (Consult Factory for Lead Time)	<b>27</b> - 2700°K <b>30</b> - 3000°K <b>35</b> - 3500°K <b>40</b> - 4000°K	<b>MV</b> - Multi Volt	<b>ND</b> - Non Dimming <b>010</b> - 0 -10V <b>PCT</b> - Phase Cut TRIAC (120V only)	<b>CP</b> - Composite	<b>ER-1504-1</b> (1 Extension Ring) <b>ER-1504-2</b> (2 Extension Rings) <b>ER-1504-3</b> (3 Extension Rings) <b>FT</b> - Flush Tray