



8165 E. Kaiser Blvd. Anaheim, CA 92808
 www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L061805946.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L061805946
 [TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
 [ISSUEDATE] 7/13/2018
 [MANUFAC] USTE, dba Vista Professional Outdoor Lighting
 [LUMCAT] 1185-VNS-A-CX
 [LUMINAIRE] LED Ingrade, VNS Distribution
 [BALLASTCAT] ENERGY RECOVERY PRODUCTS
 ESS030W-0620-42(620mA)[OTHER] INDICATING THE CANDELA VALUES
 ARE ABSOLUTE AND
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
 [INPUT] 120VAC, 25.52W
 [TEST PROCEDURE] IESNA:LM-79-08

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS

NEMA Type	2 H x 2 V
Maximum Candela	25430
Maximum Candela Angle	0H 0V
Horizontal Beam Angle (50%)	9.3
Vertical Beam Angle (50%)	9.3
Horizontal Field Angle (10%)	20.1
Vertical Field Angle (10%)	20.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	435
Beam Efficiency	N.A.
Field Lumens	798
Field Efficiency	N.A.
Spill Lumens	343
Luminaire Lumens	1141
Total Efficiency	N.A.
Total Luminaire Watts	25.52
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L061805946.IES


AXIAL CANDELA

DEG.	HOR.	DEG.	VERT.
90	0	90	0
85	0	85	0
75	0	75	0
65	1	65	1
55	2	55	2
47.5	4	47.5	4
42.5	6	42.5	6
37.5	11	37.5	11
33	25	33	25
29	55	29	55
25.5	122	25.5	122
22.5	219	22.5	219
19.5	351	19.5	351
17	531	17	531
15	831	15	831
13	1324	13	1324
11	2035	11	2035
9	3129	9	3129
7	5697	7	5697
5	11106	5	11106
3	19944	3	19944
1	24911	1	24911
0	25430	0	25430
-1	24911	-1	24911
-3	19944	-3	19944
-5	11106	-5	11106
-7	5697	-7	5697
-9	3129	-9	3129
-11	2035	-11	2035
-13	1324	-13	1324
-15	831	-15	831
-17	531	-17	531
-19.5	351	-19.5	351
-22.5	219	-22.5	219
-25.5	122	-25.5	122
-29	55	-29	55
-33	25	-33	25
-37.5	11	-37.5	11
-42.5	6	-42.5	6
-47.5	4	-47.5	4
-55	2	-55	2
-65	1	-65	1
-75	0	-75	0
-85	0	-85	0
-90	0	-90	0

ZONAL LUMEN SUMMARY


Zone	%
0-20	92.5
0-30	98.4
0-40	99.4
0-60	99.9
0-80	100
0-90	100
10-90	30.2
20-40	6.9
20-50	7.2
40-70	0.6
60-80	0.1
70-80	0
80-90	0
90-110	0
90-120	0
90-130	0
90-150	0
90-180	0
110-180	0
0-180	100

AXIAL CANDELA DISPLAY

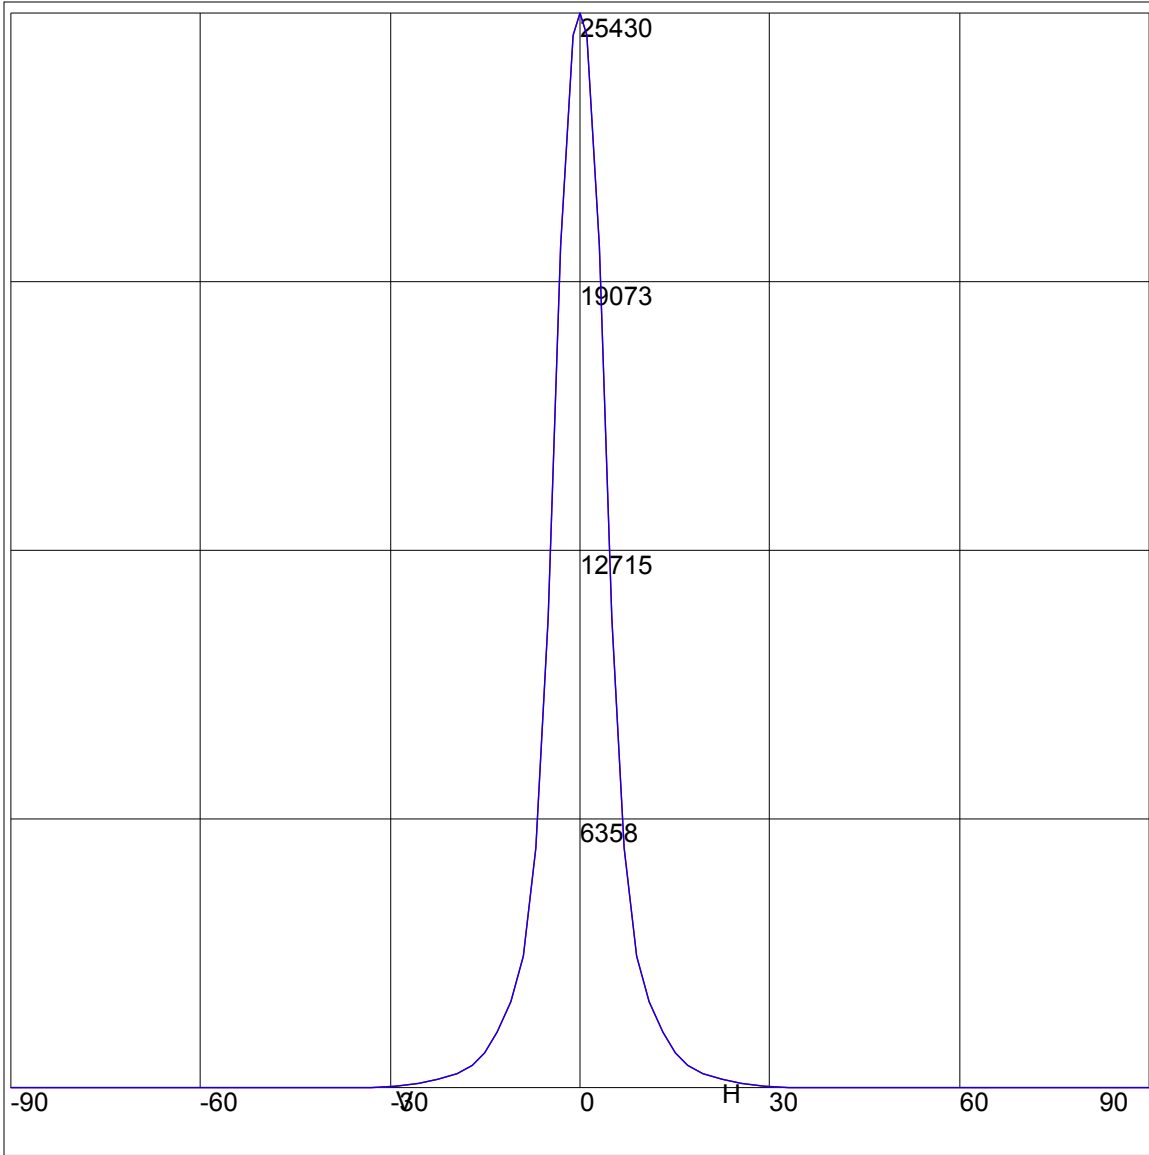

Maximum Candela = 25430 Located At Horizontal Angle = 0, Vertical Angle = 0
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

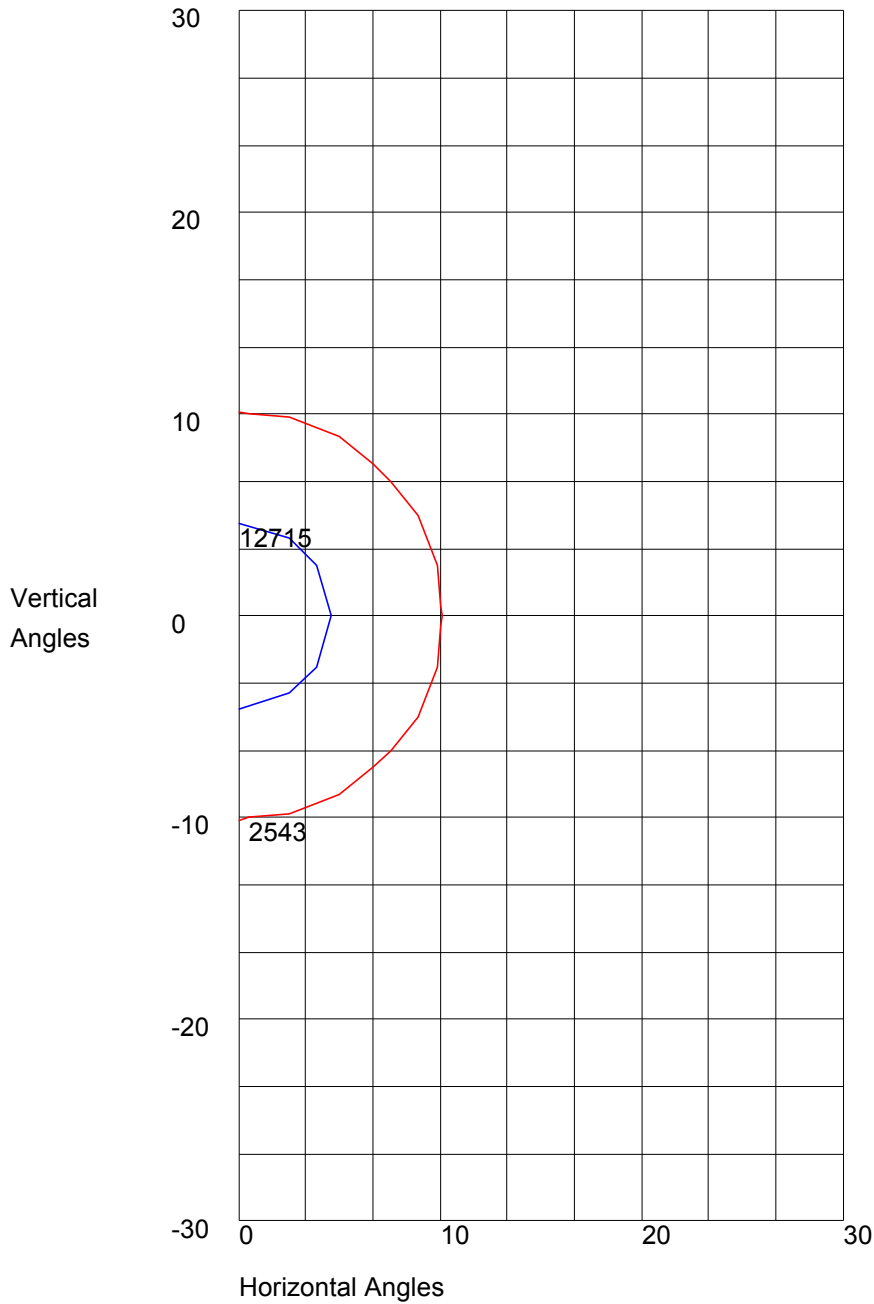

Maximum Candela = 25430 Located At Horizontal Angle = 0, Vertical Angle = 0
50% Maximum Candela = 12715
10% Maximum Candela = 2543