



MODEL 1182-SS | Specification Sheet
Commercial Series • In-Grade • LED

TYPE: MODEL:
PROJECT:

PRODUCT FEATURES



| | |
|--------------|---|
| Wattage | 6 – 14 W |
| Voltage | 120 or 277 VAC |
| Lumens | 287 – 1300 Delivered Lumens |
| Distribution | NEMA type [HxV]: 1x1 (VNS), 1x1 (NS), 4x4 (MF), 5x5 (WF) |
| CCT | 2700K, 3000K, 3500K, 4000K, 5000K |
| CRI | 80 CRI min. |
| Dimming | 0-10V or Phase Cut (TRIAC/ELV-120VAC only) available |
| Driver | Dual Volt 120 or 277VAC with tri-modal dimming capabilities |
| Dimensions | 5" DIA x 4" D |



ORDERING INFORMATION

EXAMPLE: 1182-SS-SS-MF-27-B-DV-CX-PCT-B12-TO10

| MODEL | DOOR | FINISH | DIST | TEMP | LUMENS | VOLTAGE | LENS | DIMMING | ENTRIES | ACC |
|-------|------|--------|------|------|--------|---------|------|---------|---------|-----|
| 1182 | SS | SS | | | | DV | | | | |

| MODEL | DOOR COVER | FINISH | DISTRIBUTION | COLOR TEMP | DELIVERED LUMENS | | | |
|--|--------------------|--------------------|----------------------|------------|------------------|--------|--------|--------|
| | | | | | VNS | NS | MF | WF |
| 1182 | SS Stainless Steel | SS Stainless Steel | VNS Very Narrow Spot | 27 2700K | B 287 | NS 455 | MF 564 | WF 903 |
| | | | NS Narrow Spot | 30 3000K | | | | |
| | | | MF Medium Flood | 35 3500K | | | | |
| | | | WF Wide Flood | 40 4000K | | | | |
| | | | | 40 4000K | | | | |
| | | | | 50 5000K | | | | |
| ORDERING NOTES | | | | | | | | |
| Powder Coated Aluminum Door Cover option available. See 1182-AL specification. | | | | | | | | |

| VOLTAGE | LENS | DIMMING | CONDUIT ENTRIES | ACCESSORIES |
|------------------------------|--|---|---|--|
| DV Dual Volt (120 or 277VAC) | CX Crowned Clear AX Anti Slip Clear | ND Non Dimming (B,C,D,E Delivered Lumens) 010 0-10V (E Delivered Lumens only) PCT Phase Cut (TRIAC/ELV-120VAC only) (E Delivered Lumens only) | S12 Side 1/2" B12 Bottom 1/2" B34 Bottom 3/4" | T05 Tilt Optic 5° T010 Tilt Optic 10° T015 Tilt Optic 15° DF Diffuse Filter LSF Linear Spread Filter STR Stainless Steel Trim Ring RBK Rebar Bracket Kit |



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

DOOR:

Machined and passivated 304 Stainless Steel.
Stainless steel fasteners.

FIXTURE HOUSING:

Injection-molded, glass-reinforced polymer. Unibody construction allows for superior door and optic housing support. Standard with two 1/2" NPT side tapped holes. 1/2" NPT bottom and 3/4" NPT bottom conduit entry holes optional without side holes.

OPTIC/DRIVER HOUSING:

TYPE III hard anodized/powder coat Die-cast A360 aluminum. Optic and driver compartment separately sealed while being electrically connected. Driver compartment houses electronic LED driver. Driver compartment is completely epoxy potted to protect electronics from moisture.

LENS:

3/8" thick tempered pressed clear glass. Optional anti-slip clear lens.

LED:

Performance COB LED available in various color temperatures.
6 – 14 Watts.
287-1300 Delivered Lumens

COLOR TEMPERATURE:

2700K, 3000K, 3500K, 4000K or 5000K CCT White.

COLOR RENDERING:

80 CRI minimum

OPTICS/AIMING:

TIR/Reflectorized optics designed for maximum performance and uniformity. Fixture aiming achieved via a series of tilt optic lenses and patented magnetic aiming system. Additional tilt optic lenses available.

Very Narrow Spot optic incorporates an additional internal source shield to eliminate unwanted glare outside the beam pattern.

ACCESSORIES:

Tilt Optic 5° **TO5**, Tilt Optic 10° **TO10**, Tilt Optic 15° **TO15**, Linear Spread Filter **LSF**, Rebar Bracket Kit **RBK** and Stainless Trim Ring **STR** available.

WIRING:

Prewired with 150° C-rated wire.

MOUNTING:

Fixture suitable for direct burial in earth or poured concrete. Also suitable for IC (walls only) and Non-IC installation. For both indoor and outdoor applications.

LOAD RATING:

Peak compressive force of **10,000 lbs.** This represents 95% of max load to load failure on average. Independent tests performed by SGS US Testing Company, Inc., an ISO 17025 accredited National Testing Laboratory.

CERTIFICATION:

cULus wet location listed.
Ingress Protection Rating: IP68


DRIVER:

Dual-Volt **DV** 120V or 277V input equipped with tri-modal dimming capabilities. Start up/Operating Temperature: -10°C to +50°C. Non-dimmable, 0-10V and Phase Cut (TRIAC/ELV-120VAC only) options available.

LIGHT DISTRIBUTION:

Very Narrow Spot **VNS** NEMA 1x1
Narrow Spot **NS** NEMA 1x1
Medium Flood **MF** NEMA 4x4
Wide Flood **WF** NEMA 5x5

DIMENSIONS

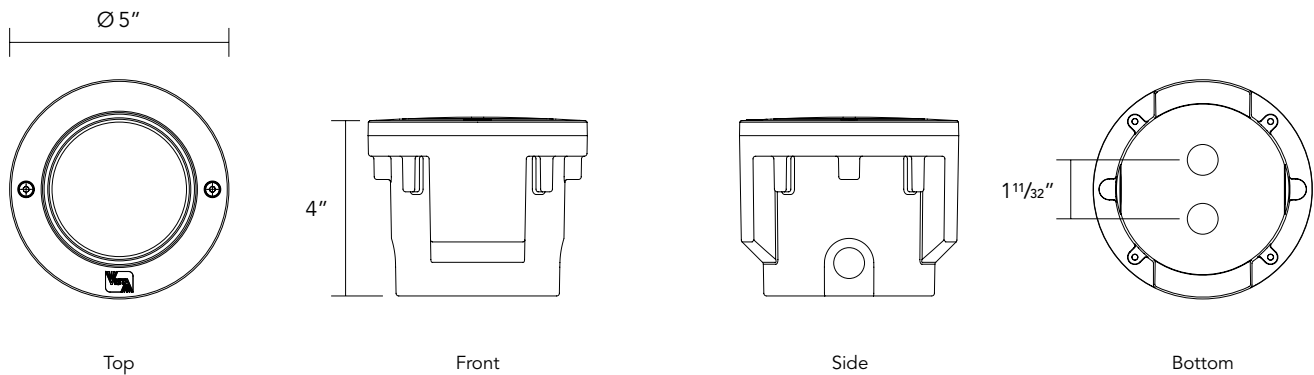



DELIVERED LUMENS

| BEAM SPREAD | B | C | D | E |
|-------------------------|-------------------------|-------------------------|---------------------------|---------------------------|
| Very Narrow Spot VNS | 6.4 Watts 287 Lumens | 10 Watts 511 Lumens | 11.7 Watts 588 Lumens | 14 Watts 646 Lumens |
| Narrow Spot NS | 6.3 Watts 455 Lumens | 9.9 Watts 777 Lumens | 11.7 Watts 912 Lumens | 13.8 Watts 1093 Lumens |
| Medium Flood MF | 6.3 Watts 564 Lumens | 9.8 Watts 908 Lumens | 11.6 Watts 1043 Lumens | 14 Watts 1241 Lumens |
| Wide Flood WF | 6.3 Watts 570 Lumens | 9.8 Watts 904 Lumens | 11.5 Watts 1084 Lumens | 14 Watts 1300 Lumens |

