




**MODEL 6540** | Specification Sheet  
Commercial Series • Low Voltage • Path & Area

TYPE:  MODEL:

PROJECT:

**PRODUCT FEATURES**

Wattage	5 W Max.
Voltage	9 – 15 VAC
Housing	Aluminum
Dimensions	5 1/2" W x 5 1/2" D x 20 7/8" H

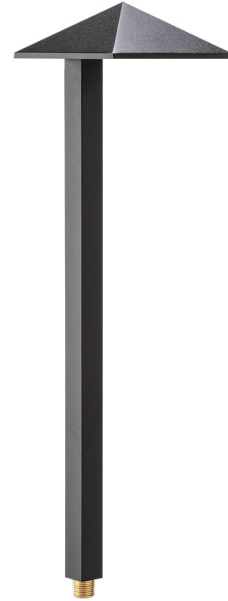

EXAMPLE: PR-6540-B-W-LB5ND

**ORDERING INFORMATION**

MOUNTING	MODEL	FINISH	LED
PR	6540		

MOUNTING	MODEL	FINISH	LED	ORDERING NOTES
PR ABS Ground Stake	6540	<b>B</b> Black	<b>W-LB2ND</b> 2 Watts   Warm   Integrated LED	Fixtures shipped with specified mounting hardware.  Custom length stems available - Consult local distributor.
		<b>Z</b> Architectural Bronze	<b>N-LB2ND</b> 2 Watts   Neutral   Integrated LED	
		<b>DZ</b> Dark Bronze	<b>C-LB2ND</b> 2 Watts   Cool   Integrated LED	
		<b>GT</b> Granite	<b>W-LB5ND</b> 4 Watts   Warm   Integrated LED	
		<b>W</b> White	<b>N-LB5ND</b> 4 Watts   Neutral   Integrated LED	
		<b>BR</b> Architectural Brick	<b>C-LB5ND</b> 4 Watts   Cool   Integrated LED	
		<b>LZ</b> Light Bronze	<b>150-W-G4</b> 1.5 Watts   Warm   G4 LED Lamp	
		<b>SB</b> Special Bronze		
		<b>GG</b> Glossy Gray		
		<b>R</b> Rust	<b>NL</b> No Lamp	
		<b>HG</b> Hunter Green		
		<b>WB</b> Weathered Bronze		
		<b>WI</b> Weathered Iron		
		<b>GM</b> Graphite Metallic		
		<b>G</b> Verde		
<b>P</b> Pewter				
<b>M</b> Mocha				
<b>OF</b> Olde Finish				



PROFESSIONAL  
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)  
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



**SPECIFICATIONS**

**HOUSING CONSTRUCTION:**

Die-cast A360 aluminum.

**STEM CONSTRUCTION:**

1" sq. aluminum tube.

**FINISH:**

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

**LENS:**

Clear, high-impact polycarbonate lens.

**MOUNTING:**

Bottom of stem fitted with 1/2" NPT Brass Connection.

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

**CERTIFICATIONS | STANDARDS | COMPLIANCE:**

- UL Certified for wet locations (USA & Canada) | (UL 1838)
- Buy American Act (BAA)
- Build America, Buy America Act (BABA)

**LED:**

- Integrated LED Module. 2 – 4 Watts.
- G4 LED Lamp. 1.5 Watts.

**ELECTRICAL:**

Input voltage range 9 - 15 VAC.  
Low voltage transformer required to operate (sold separately).

**DIMENSIONS**

