



MODEL 6540 | Specification Sheet


Commercial Series • Low Voltage • Path & Area

TYPE: MODEL:

PROJECT:

PRODUCT FEATURES

Wattage	5 W Max.
Voltage	9 – 15 VAC
Housing	Aluminum
Dimensions	5 ½" W x 5 ½" D x 20 7⁄8" H

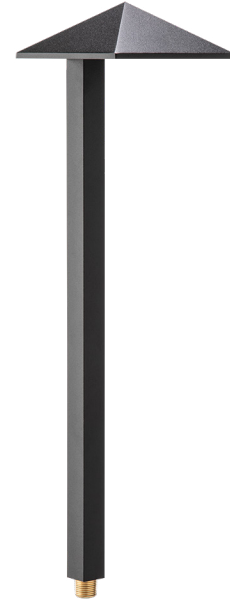

EXAMPLE: **PR-6540-B-W-LB5ND**

ORDERING INFORMATION

MOUNTING	MODEL	FINISH	LED
PR	6540		

MOUNTING	MODEL	FINISH	LED	ORDERING NOTES
PR ABS Ground Stake	6540	B Black	150-W-G4 1.5 Watts Warm G4 LED Lamp NL No Lamp	Fixtures shipped with specified mounting hardware.
		Z Architectural Bronze		
		DZ Dark Bronze		Custom length stems available - Consult local distributor.
		GT Granite		
		W White		
		BR Architectural Brick		
		LZ Light Bronze		
		SB Special Bronze		
		GG Glossy Gray		
		R Rust		
		HG Hunter Green		
		WB Weathered Bronze		
		WI Weathered Iron		
		GM Graphite Metallic		
		G Verde		
		P Pewter		
		M Mocha		
		OF Olde Finish		



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)
Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING CONSTRUCTION:

Die-cast A360 aluminum.

STEM CONSTRUCTION:

1" sq. aluminum tube.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

LENS:

Clear, high-impact polycarbonate lens.

MOUNTING:

Bottom of stem fitted with 1/2" NPT Brass Connection.

FASTENERS:

All fasteners are stainless steel.

WIRING:

Prewired with a 36" pigtail of 18-2 direct-burial cable and underground connectors.

CERTIFICATIONS | STANDARDS | COMPLIANCE:

- UL Certified for wet locations (USA & Canada) | (UL 1838)
- Buy American Act (BAA)
- Build America, Buy America Act (BABA)

LED:

- Integrated LED Module. 2 – 4 Watts.
- G4 LED Lamp. 1.5 Watts.

ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

DIMENSIONS

