



1054YM • RGBW • FLYING LEADS

Specification Sheet | Commercial Series • Linear Floodlight

TYPE:

MODEL:

PROJECT:

PRODUCT FEATURES



Wattage	100 W (MAX)
Voltage	120 – 277 VAC
Lumens	8346 Delivered Lumens (MAX)
Distribution	Narrow, Medium Flood, Wide Flood, Wall Wash, Wall Grazer, Asymmetric
Color	RGB and Tunable White (2200K – 6000K)
Controls	DMX 512-A with RDM capabilities
Driver	4 channel DMX512-A/RDM compatible
Dimensions	48" W x 8 7/16" H



ORDERING INFORMATION

EXAMPLE: 1054YM-B-AS-RGBW-FL-MV-DMX-10

MODEL	FINISH	DISTRIBUTION	COLOR	MOUNTING	VOLTAGE	CONTROL	ACCESSORIES
1054YM			RGBW		MV	DMX	

MODEL	FINISH			DISTRIBUTION	
1054YM	B	Black	BR	Architectural Brick	G Verde
	Z	Architectural Bronze	LZ	Light Bronze	P Pewter
	DZ	Dark Bronze	SB	Special Bronze	M Mocha
	GT	Granite	GG	Glossy Gray	OF Olde Finish
	W	White	R	Rust	
			HG	Hunter Green	
			WB	Weathered Bronze	
			WI	Weathered Iron	
			GM	Graphite Metallic	
COLOR	MOUNTING		VOLTAGE	CONTROL	ACCESSORIES
RGBW RGB + Tunable White	FL	Flying Leads	MV	Multi Volt	DMX DMX 512-A with RDM capabilities
					GS Internal Glare Shield
					VR Polycarbonate Lens
					10 10 feet additional cable
					20 20 feet additional cable



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)

1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING:

Extruded aluminum body with die-cast aluminum end caps and mountings.
Optic and driver compartment environmentally sealed.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

REFLECTOR:

Specular or semi-specular extruded aluminum optics anodized and bright dipped for maximum reflectivity.

ACCESSORIES:

Internal Glare Shield **GS**, Polycarbonate Lens **VR**, 10 feet additional cable **(10)**, 20 feet additional cable **(20)** available.

WIRING:

- **Power:** 3 conductor outdoor rated cable, 5 feet standard.
- **Communication:** DMX outdoor rated cable: 2 twisted pairs in & out plus drain, 5 feet standard.
- **Cabling:** Exits luminaire housing through liquid tight cable fittings.
See Accessories for optional lengths.

LED:

White and RGB LEDs arranged in four channel configuration.
Configuration allows for infinite color combinations.

CONTROLS:

Integral drivers equipped, **Two (2) included in fixture head**, with DMX512-A protocols.
Each integral driver has a unique 12 digit UID.
Fixture identification accessible through RDM and consumes **2 Nodes** on a standard **32 Node** (max) DMX BUS.

COLOR RENDERING (WHITE):

90 CRI minimum at 3000K

AIMING:

Fixture aiming achieved via an aluminum yoke strap and stainless fasteners beneath removable decorative yoke caps. Fixture can swing completely through yoke strap.

LIGHT DISTRIBUTION [WHITE]:

Narrow **NS** (88.3° H x 28.4° V) | Max. Candela: 6121
Medium Flood **MF** (95.3° H x 57.3° V) | Max. Candela: 2521
Wide Flood **WF** (78.2° H x 88.2° V) | Max. Candela: 3102
Wall Wash **WW** (83.5° H x 50.5° V) | Max. Candela: 4176
Wall Grazer **WG** (101.1° H x 20.6° V) | Max. Candela: 11481
Asymmetric **AS** (91.8° H x 67.3° V) | Max. Candela: 4146

FIXTURE MOUNTING:

- Extruded aluminum Yoke Mount, affixed with stainless steel hardware.
Yoke Mount is adjustable for precise aiming.
- Yoke provided with ½ NPT stainless steel cable fitting to secure the yoke strap directly onto an outdoor rated fitting (by others).

CERTIFICATION:

cULus wet location listed.

DRIVER:

4 channel DMX512-A/RDM compatible driver 12 digit UID number.

Driver is factory set to start Channel 1:


Channel 1 – Red
Channel 2 – Green
Channel 3 – Blue
Channel 4 – White

The start channel can be changed during commissioning via RDM using the driver 12 digit UID number.





DIMENSIONS

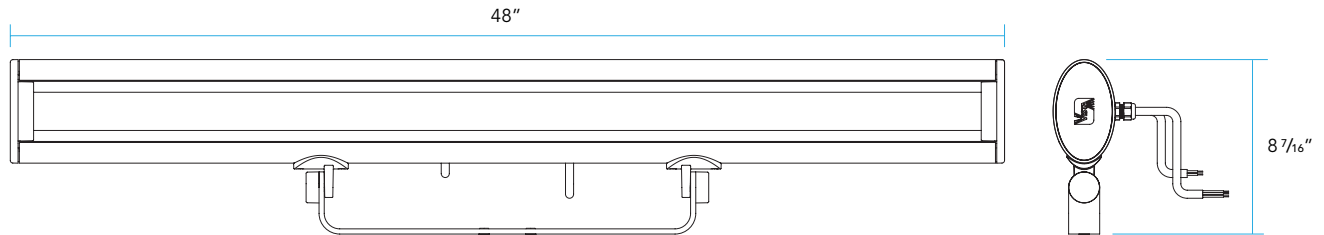

DELIVERED LUMENS SPECIFICATION

DISTRIBUTION	RED	GREEN	BLUE	WHITE
Narrow NS	30 Watts 791 Lumens	41 Watts 1884 Lumens	40 Watts 426 Lumens	96 Watts 6489 Lumens
Medium Flood MF	30 Watts 1009 Lumens	42 Watts 2473 Lumens	41 Watts 562 Lumens	98 Watts 8271 Lumens
Wide Flood WF	31 Watts 884 Lumens	42 Watts 2073 Lumens	42 Watts 553 Lumens	99 Watts 6630 Lumens
Wall Wash WW	31 Watts 916 Lumens	42 Watts 2131 Lumens	43 Watts 562 Lumens	99 Watts 6930 Lumens
Wall Grazer WG	31 Watts 1073 Lumens	42 Watts 2550 Lumens	42 Watts 680 Lumens	100 Watts 8346 Lumens
Asymmetric AS	29 Watts 908 Lumens	41 Watts 2157 Lumens	41 Watts 485 Lumens	96 Watts 7069 Lumens





CHROMATICITY

COLOR TEMPERATURE WHITE [W]:

2200K – 6000K CCT

RED WAVELENGTH [R]:

619nm – 625nm

GREEN WAVELENGTH [G]:

520nm – 530nm

BLUE WAVELENGTH [B]:

465nm – 475nm

LED MODELS:

Lumileds LUXEON 2835 HE

Lumileds LUXEON 3528 RGB

- R** Red Wavelength Range
- G** Green Wavelength Range
- B** Blue Wavelength Range
- W** White Color Temperature Range
- A** Combined RGB Visible Color Range

