



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT

PHOTOMETRIC FILENAME : L112310573.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L112310573
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUEDATE] 3/14/2024
[MANUFAC] USTE dba Vista Professional Outdoor Lighting
[LUMCAT] 1043-NS-RGBW-(W)

[LUMINAIRE] 1043 (Accent), Narrow, White output
[BALLASTCAT] eldoLED PW50S-M4Z0X1, QTY:1
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 120VAC
[TEST PROCEDURE] IESNA:LM-79-19

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS


NEMA Type	4 H x 4 V
Maximum Candela	2102
Maximum Candela Angle	0H 0V
Horizontal Beam Angle (50%)	18.3
Vertical Beam Angle (50%)	18.3
Horizontal Field Angle (10%)	56.3
Vertical Field Angle (10%)	56.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	122
Beam Efficiency	N.A.
Field Lumens	377
Field Efficiency	N.A.
Spill Lumens	187
Luminaire Lumens	565
Total Efficiency	N.A.
Total Luminaire Watts	16.47
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L112310573.IES

AXIAL CANDELA


DEG.	HOR.	DEG.	VERT.
90	0	90	0
85	12	85	12
75	12	75	12
65	15	65	15
55	22	55	22
47.5	36	47.5	36
42.5	55	42.5	55
37.5	93	37.5	93
33	146	33	146
29	200	29	200
25.5	243	25.5	243
22.5	283	22.5	283
19.5	338	19.5	338
17	414	17	414
15	506	15	506
13	646	13	646
11	836	11	836
9	1070	9	1070
7	1361	7	1361
5	1652	5	1652
3	1906	3	1906
1	2068	1	2068
0	2102	0	2102
-1	2068	-1	2068
-3	1906	-3	1906
-5	1652	-5	1652
-7	1361	-7	1361
-9	1070	-9	1070
-11	836	-11	836
-13	646	-13	646
-15	506	-15	506
-17	414	-17	414
-19.5	338	-19.5	338
-22.5	283	-22.5	283
-25.5	243	-25.5	243
-29	200	-29	200
-33	146	-33	146
-37.5	93	-37.5	93
-42.5	55	-42.5	55
-47.5	36	-47.5	36
-55	22	-55	22
-65	15	-65	15
-75	12	-75	12
-85	12	-85	12
-90	0	-90	0

AXIAL CANDELA DISPLAY

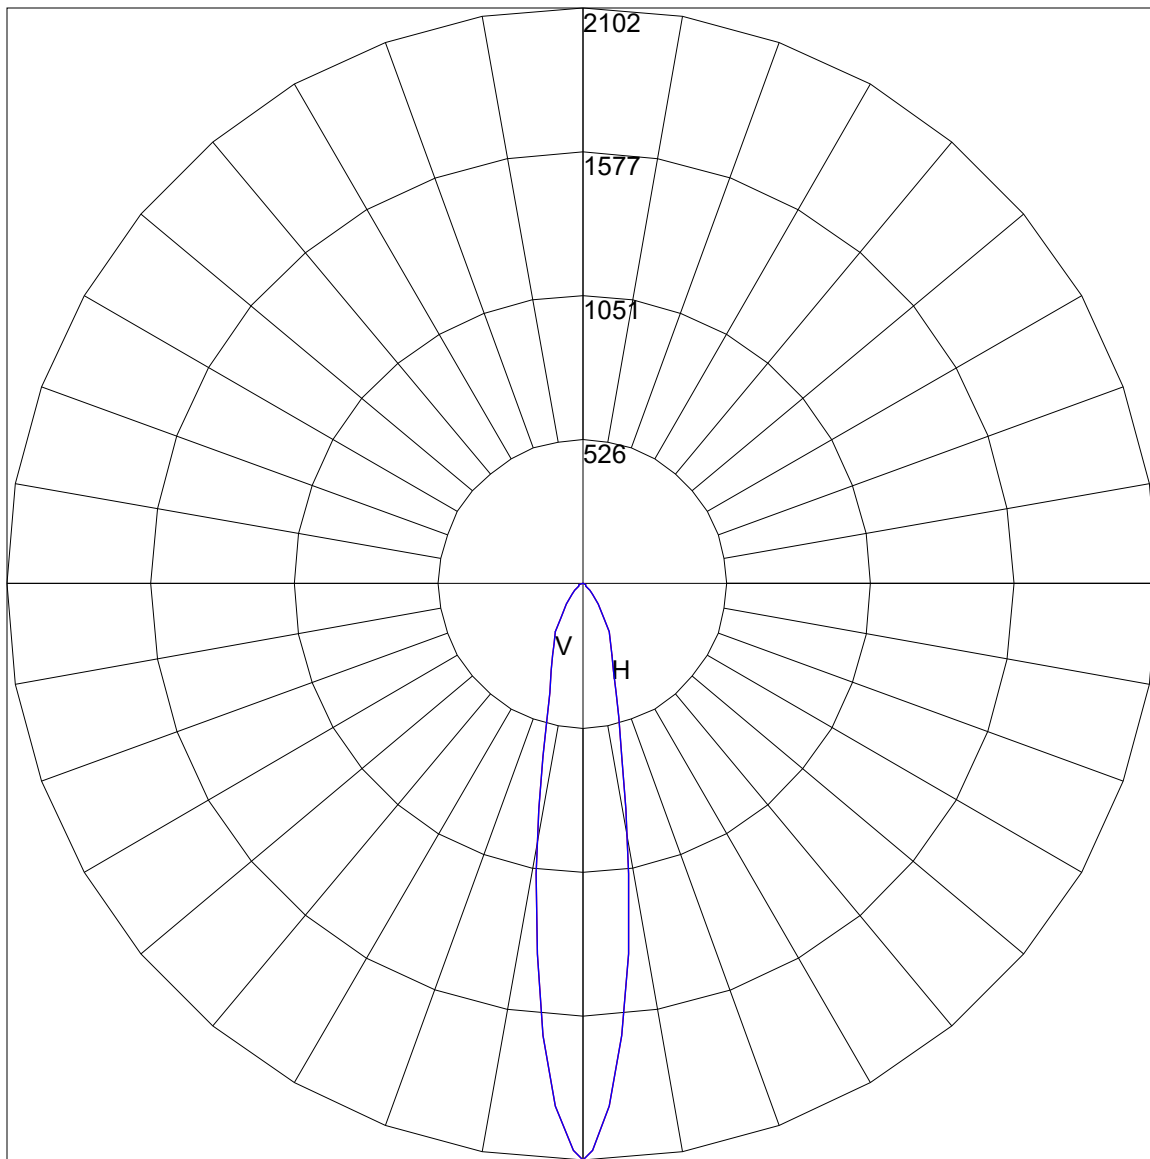

Maximum Candela = 2102 Located At Horizontal Angle = 0, Vertical Angle = 0
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

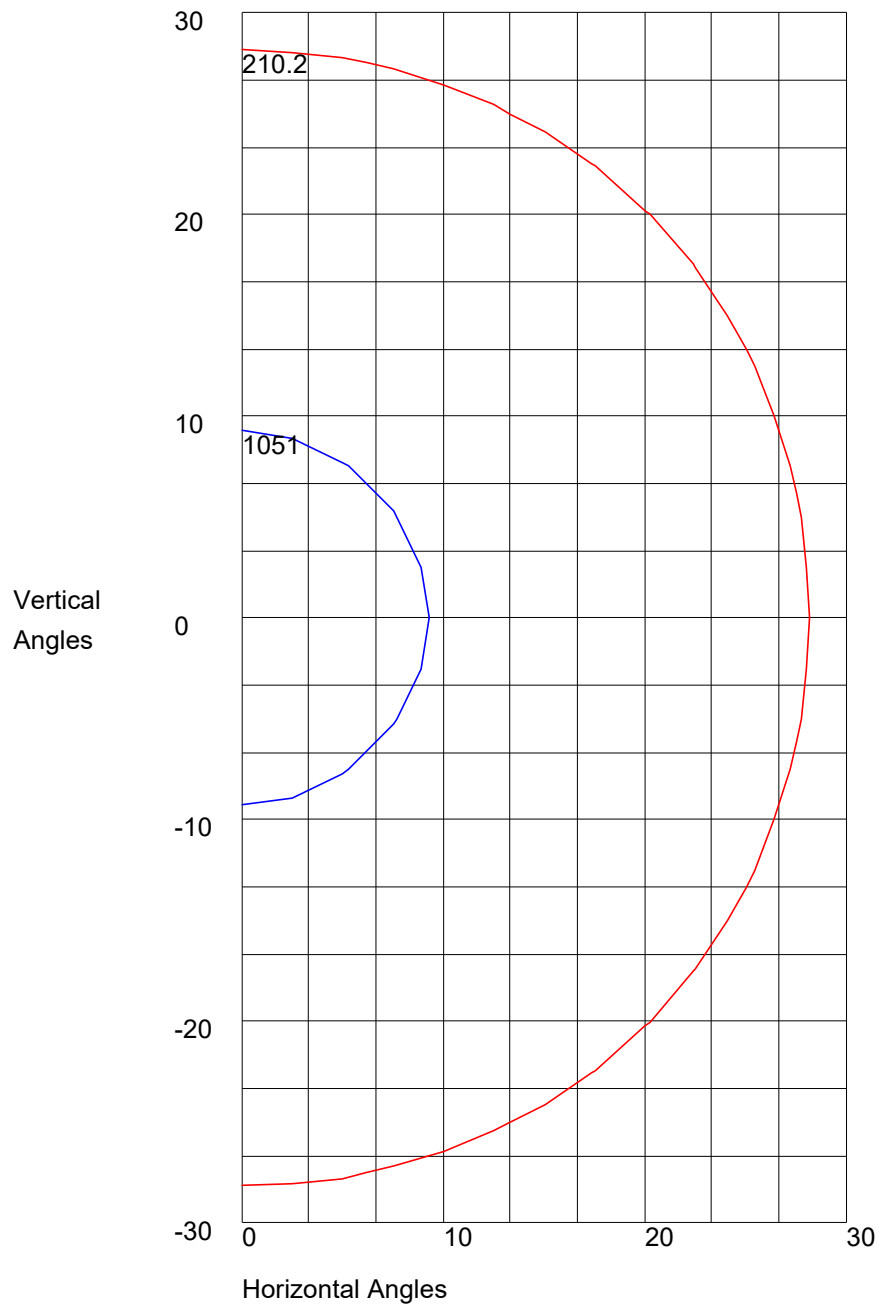

Maximum Candela = 2102 Located At Horizontal Angle = 0, Vertical Angle = 0
50% Maximum Candela = 1051
10% Maximum Candela = 210.2



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L112310573



Report No: L112310573

Issue Date: 3/14/2024

Report Prepared For: USTE dba Vista Professional Outdoor Lighting
1625 Surveyor Ave., Simi Valley CA 93063

Reference:N/A

Amendment:N/A

Model Number: 1043-NS-(W)

Test: Photometric/Colorimetric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:

IESNA LM79: 2019 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2017 Specification of the Chromaticity of Solid State Lighting Products

ANSI C82.77-10:2014: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Date of Tests: 3/14/24

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	4/7/25
HP Power Supply	6032A	PS-DC05-S2	--
Fluke Digital Thermometer	52K/J	MT-TP05	5/24/25
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	USTE dba Vista Professional Outdoor Lighting
Model Number:	1043-NS-(W)
Driver Model Number:	eldoLED PW50S-M4Z0X1, QTY:1

Test Summary

Total Lumens:	565.00
Efficacy:	34.31
Color Redering Index:	81.5
Correlated Color Temperature:	3194
Input Voltage (VAC/60Hz):	120.01
Input Current (Amp):	0.1417
Input Power (W):	16.47
Input Power Factor:	0.9680
Current ATHD (%):	11.2%

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	1:05
Total Operating Time (Hours):	1:40


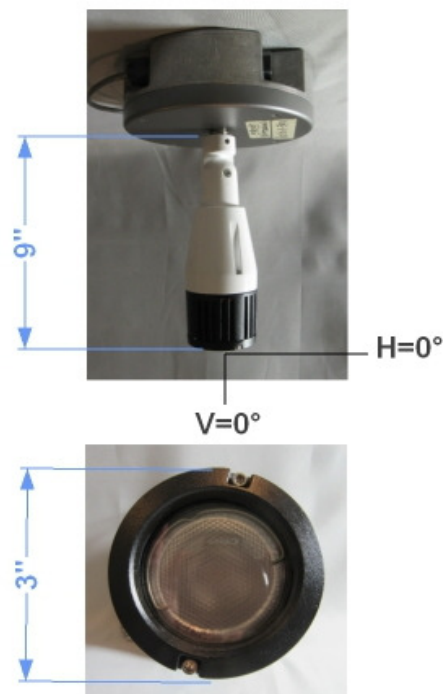


FIG. 1 LUMINAIRE

Colorimetry Test Results

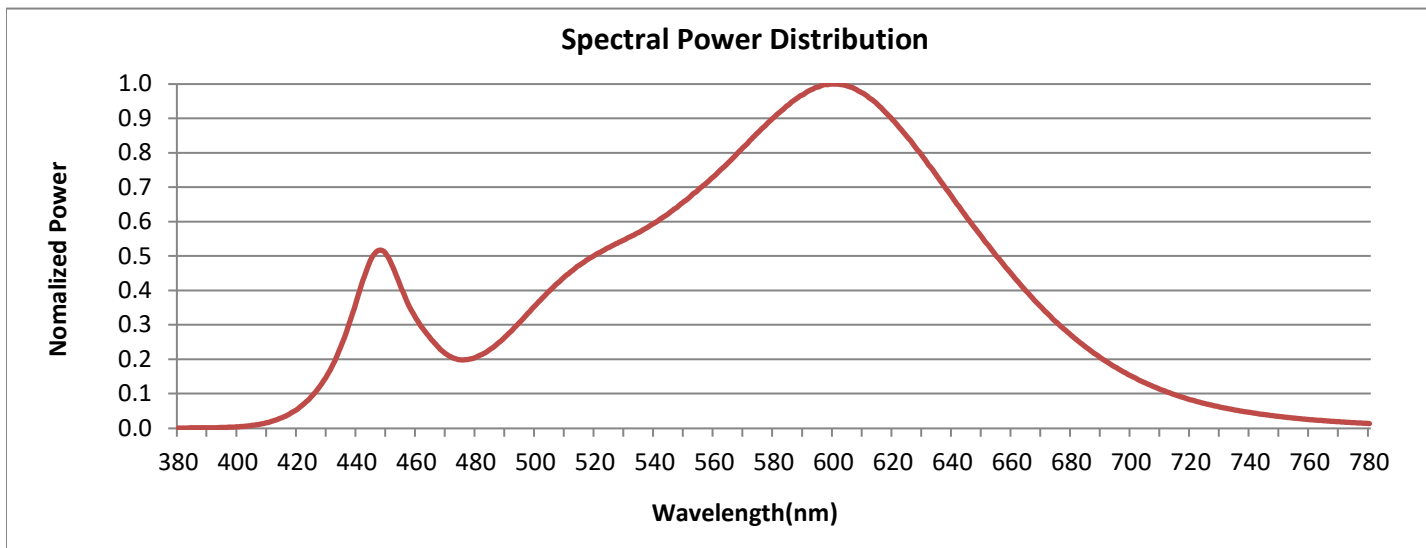


CRI & CCT

x	0.4258
y	0.4037
u'	0.2436
v'	0.5196
CRI	81.50
CCT	3194
Duv	0.00154

R Values

R1	78.84
R2	88.47
R3	96.74
R4	80.36
R5	79.53
R6	86.08
R7	83.47
R8	58.15
R9	1.22
R10	74.16
R11	79.24
R12	70.04
R13	80.79
R14	98.20
R15	71.26

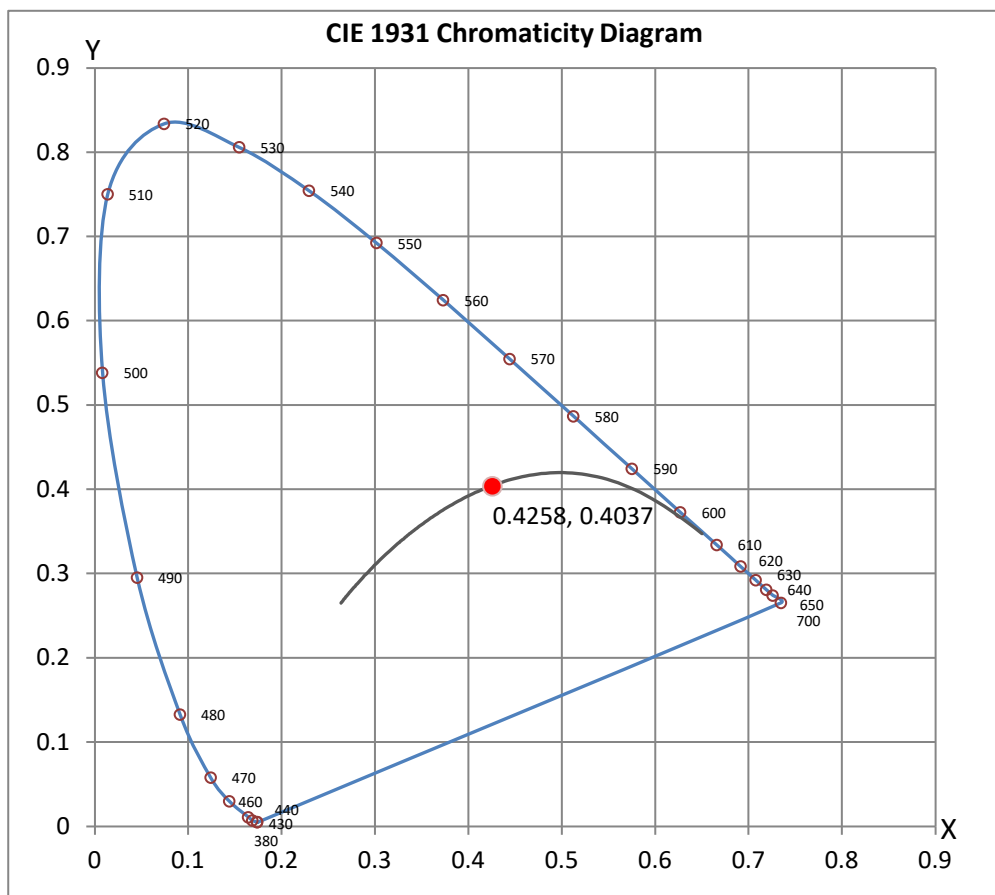



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L112310573



NVLAP LAB CODE 200927-0

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

The results related only to the samples as received and tested. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government.

Report Prepared by : JG

Test Report Reviewed by:

Steve Kang
Quality Assurance

**Attached are photometric data reports.*