



5005 + EAM-D | Specification Sheet

Commercial Series • Low Voltage • Sign Light

TYPE: MODEL:

PROJECT:

DESCRIPTION



- Extended Arm Mount (**EAM**) extends two **5005** Floodlights off a surface for a variety of lighting applications.
- Sign lights are suitable for wall and ground mount applications.
- This is a double head sign light. Single head sign lights are available.



5005



EAM-D-S



EAM-D-90



EAM-D-R45



EAM-D-R180

5005 PRODUCT FEATURES

Wattage	9 W Max.
Voltage	9 – 15 VAC
Lumens (4.5 – 13W)	295 or 389 Lumens
Lamp Type	MR-16 LED
Distribution	15° (VNS), 25° (NS), 36° (MF), 60° (WF)
Housing	Die-cast Aluminum
Dimensions	2 5/8" DIA x 5 1/4" D

EAM-D PRODUCT FEATURES

Material	Aluminum
Mounting	1/2" NPT
EAM-D-S	[12" 18"] W x [18" 24" 36"] L
EAM-D-90	[12" 18"] W x [18" 24" 36"] L
EAM-D-R45	[12" 18"] W x [18" 24" 36"] L
EAM-D-R180	[12" 18"] W x [18" 24" 36"] L
90S 90° Slip-fitter	1 1/2" Dia x 3" L

90S



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)
Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



5005 ORDERING INFORMATION

EXAMPLE: 5005-B-4.5-W-36-IK-HL-5

MODEL	FINISH	LED	KNUCKLE	ACC	ACC
5005			IK		5

MODEL	FINISH
5005	B Black
	Z Architectural Bronze
	DZ Dark Bronze
	GT Granite
	W White
	BR Architectural Brick
	LZ Light Bronze
	SB Special Bronze
	GG Glossy Gray
	R Rust
	HG Hunter Green
	WB Weathered Bronze
	WI Weathered Iron
	GM Graphite Metallic
	G Verde
	P Pewter
	M Mocha
	OF Olde Finish

LED	KNUCKLE	ACCESSORIES	ORDERING NOTES
4.5-W-15 4.5 Watts Warm 15° Narrow Spot	IK Infinity Knuckle	FR Frosted Lens	* Not available with VNS distribution
4.5-W-25 4.5 Watts Warm 25° Spot		BL Flat Cool Blue Lens	
4.5-W-36 4.5 Watts Warm 36° Flood		SL Flat Spread Lens	If fixture is to be used in conjunction with Extended Arm Mount (EAM): Must specify with extended wire length
4.5-W-60 4.5 Watts Warm 60° Wide Flood		DBL Flat Dark Blue Lens	
5.5-W-15 5.5 Watts Warm 15° Narrow Spot		GL Flat Dark Green Lens	
5.5-W-25 5.5 Watts Warm 25° Spot		RL Flat Red Lens	
5.5-W-36 5.5 Watts Warm 36° Flood		YL Flat Amber Lens	
5.5-W-60 5.5 Watts Warm 60° Wide Flood		HL Honeycomb louver	
NL No Lamp		5 5' Wire Lead (required for use with EAM)	

EAM-D ORDERING INFORMATION

EXAMPLE: EAM-D12-B-S-24-90S

MODEL	CONFIGURATION	FINISH	SWEEP	LENGTH	ACCESSORIES
EAM					

MODEL	CONFIGURATION	FINISH
EAM	D12 12" wide double mount	B Black
	D18 18" wide double mount	Z Architectural Bronze
		DZ Dark Bronze
		GT Granite
		W White
		BR Architectural Brick
		LZ Light Bronze
		SB Special Bronze
		GG Glossy Gray
		R Rust
		HG Hunter Green
		WB Weathered Bronze
		WI Weathered Iron
		GM Graphite Metallic
		G Verde
		P Pewter
		M Mocha
		OF Olde Finish

SWEEP	LENGTH	ACCESSORIES	ORDERING NOTES
S Straight	18 18 Inches	90S 90° Slip-fitter	Custom length stems available – Consult Vista factory.
90 Ninety	24 24 Inches		
R45 Reverse Forty-Five	36 36 Inches		
R180 Reverse One-Eighty			





5005 SPECIFICATIONS

HOUSING:

Die-cast A360 aluminum. Optic and driver compartment environmentally sealed. Housing aimable utilizing Vista's patented Infinity Knuckle.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

LENS:

Clear, tempered glass lens.
Optical effect lenses are available.

WIRING:

Prewired with 150° C-rated wire.

MOUNTING:

Infinity Knuckle – Die-cast A360 aluminum, stainless steel stem with ½" NPT thread. A fully sealed spherical grommet allows for precise aiming and retention.

CERTIFICATION:

- UL Certified for wet locations (USA & Canada) | (UL 1838)
- Buy American Act (BAA)
- Build America, Buy America Act (BABA)

LED:

MR-16 LED Lamp.
295 or 389 Lumens.
4.5 or 5.5 Watts.

ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

LIGHT DISTRIBUTION:

Very Narrow Spot **VNS** (15°)
Narrow Spot **NS** (25°)
Medium Flood **MF** (36°)
Wide Flood **WF** (60°)

EAM-D SPECIFICATIONS

CONSTRUCTION:

Heavy wall extruded, die-cast and machined aluminum parts.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.


MOUNTING:

½" NPT threading for connection to mounting accessory such as a Vista Wall Mount Box or Mounting Canopy.

ACCESSORIES:

A convenient and compact 90° machined aluminum Slip-fitter can be ordered to change the lighting fixture orientation 90° at the end of the extension arm.


INFINITY KNUCKLE FEATURES

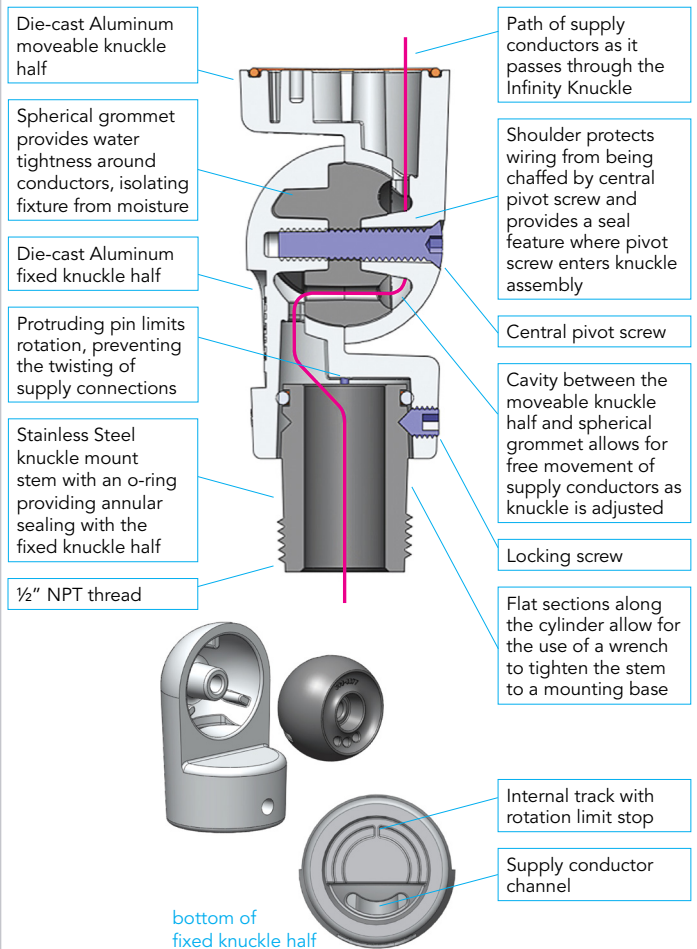





DIMENSIONS



5005

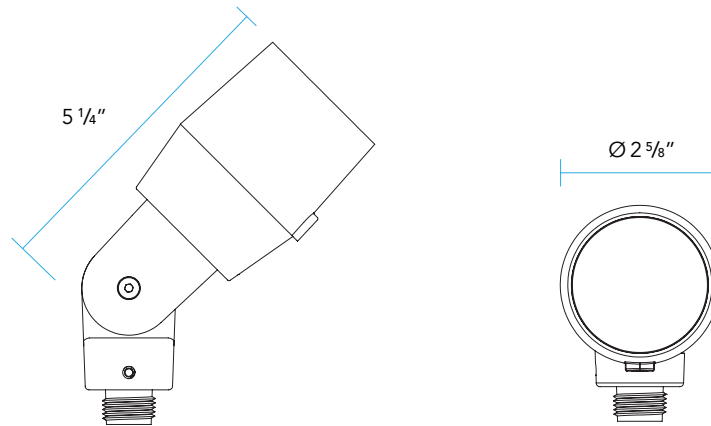

EAM-D-S

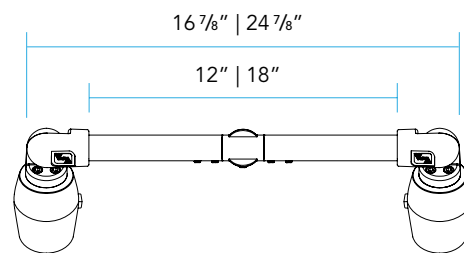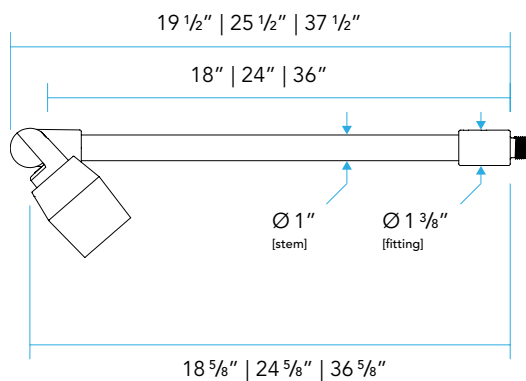


EAM-D-90

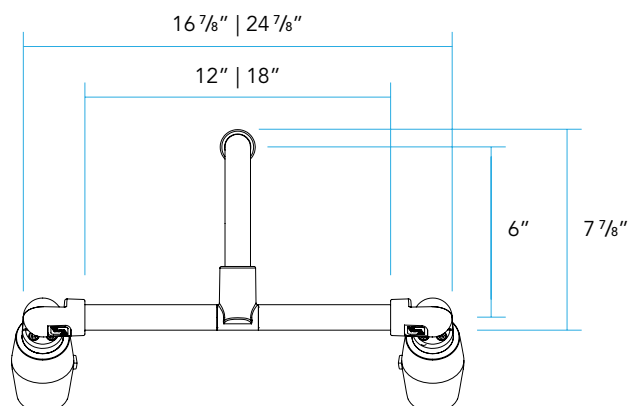
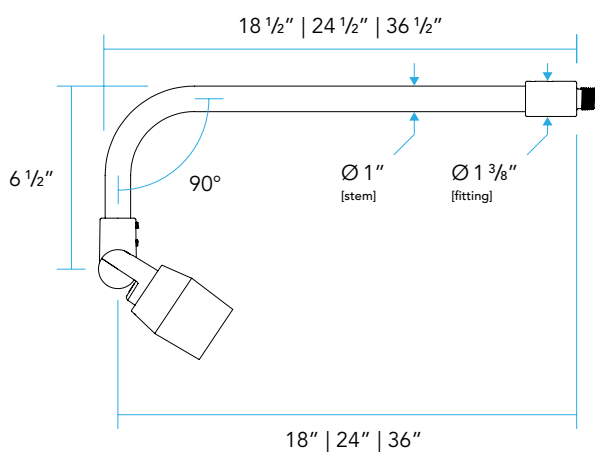






DIMENSIONS

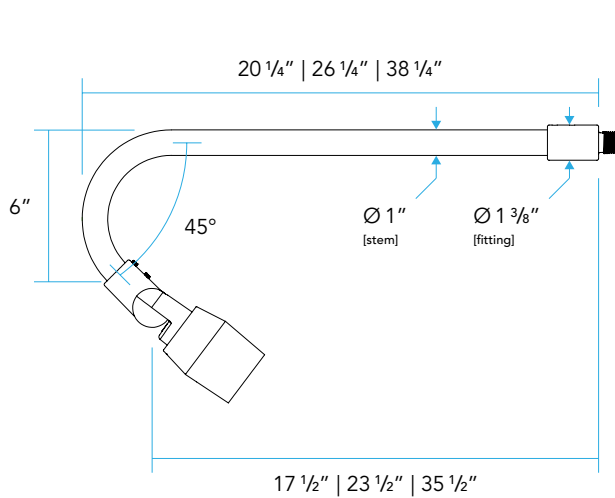

EAM-D-R45

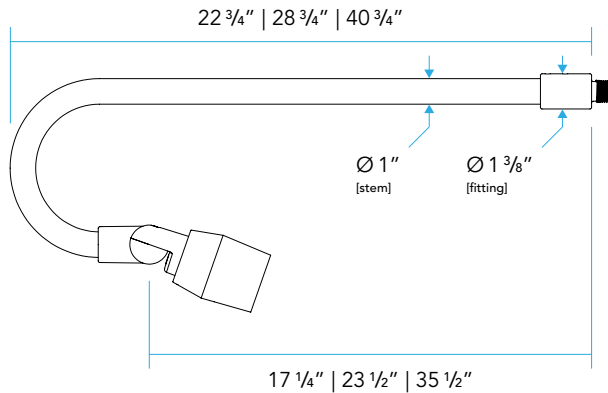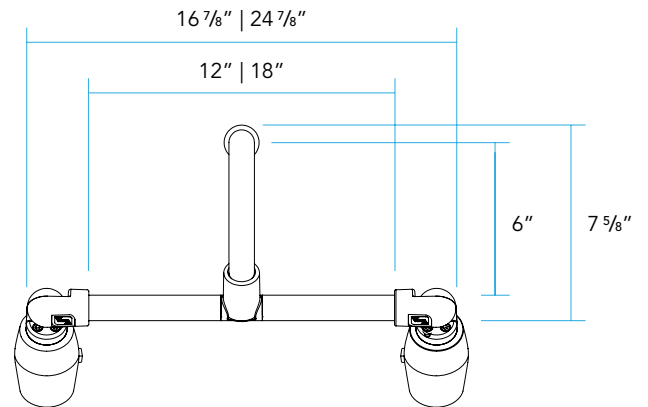

EAM-D-R180

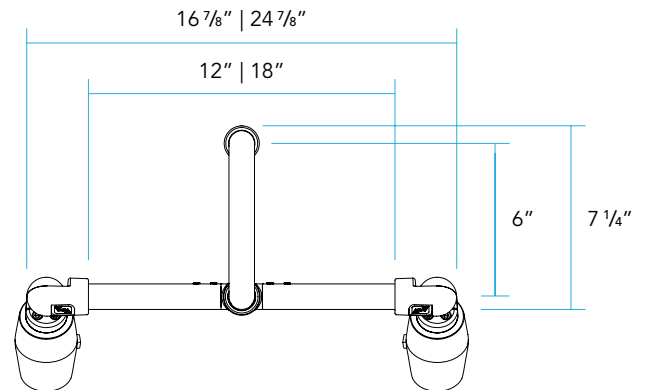

90S

