



1045 • RGBW • SURFACE BOX

Specification Sheet | Commercial Series • Floodlight

TYPE:

MODEL:

PROJECT:

PRODUCT FEATURES



Wattage	22 W (MAX)
Voltage	120 – 277 VAC
Lumens	727 Delivered Lumens (MAX)
Distribution	Narrow Spot (23.5°), Medium Flood (36°), Wide Flood (53.5°)
Color	RGB and Tunable White (2200K – 6000K)
Controls	DMX 512-A with RDM capabilities
Driver	4 channel DMX512-A/RDM compatible
Fixture Dimensions	4 ½" DIA x 10 ½" D
Surface Box Dimensions	8" DIA x 2 ¾" D



ORDERING INFORMATION

EXAMPLE: 1045-GM-MF-RGBW-SB12-MV-DMX-FS

MODEL	FINISH	DISTRIBUTION	COLOR	MOUNTING	VOLTAGE	CONTROL	ACCESSORIES
1045			RGBW		MV	DMX	

MODEL	FINISH			DISTRIBUTION		COLOR	
1045	B	Black	BR	Architectural Brick	G	Verde	NS Narrow Spot MF Medium Flood WF Wide Flood
	Z	Architectural Bronze	LZ	Light Bronze	P	Pewter	
	DZ	Dark Bronze	SB	Special Bronze	M	Mocha	
	GT	Granite	GG	Glossy Gray	OF	Olde Finish	
	W	White	R	Rust			
			HG	Hunter Green			
			WB	Weathered Bronze			
			WI	Weathered Iron			
			GM	Graphite Metallic			
MOUNTING		VOLTAGE		CONTROL		ACCESSORIES	
SB12 Surface Box ½" NPT hubs		MV Multi Volt (120-277VAC)		DMX DMX 512-A with RDM capabilities		BD Barn Doors	
SB34 Surface Box ¾" NPT hubs						FS Full Light Shield	
SBKO Surface Box 4-0 Box Knockout						HS Half Light Shield	
						CS Cast Shield	



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)

1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

FIXTURE HOUSING:

Die-cast A360 aluminum. Optic and driver compartment environmentally sealed.

SURFACE BOX HOUSING:

Die-cast A360 aluminum. Separate power and communication splicing compartments environmentally sealed. Integral 4 channel DMX driver completely wired by factory.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha, and Olde Finish. Custom Powder coat finishes available on request.

LENS:

4mm thick clear tempered glass

REFLECTOR:

Precision molded and metalized reflectors.

ACCESSORIES:

Barn Doors **BD**, Full Shield **FS**, Half Shield **HS**, Cast Shield **CS** available.

LED:

5 white, 4 Red, 4 Green, 4 Blue high performance LEDs in 4 channel configuration.

CONTROLS:

Integral drivers equipped, **One (1) included**, with DMX512-A protocols. Each integral driver has a unique 12 digit UID. Fixture identification accessible through RDM and consumes **1 Node** on a standard **32 Node** (max) DMX BUS.

COLOR RENDERING (WHITE):

80 CRI minimum at 3000K

AIMING:

Fixture aiming achieved via an aluminum yoke strap and stainless fasteners beneath removable decorative yoke caps. Fixture can swing completely through yoke strap.

WIRING:

- **Power:** 3 conductors. Terminates in isolated power junction box of the Surface Box.
- **Communication:** DMX: 2 twisted pairs in & out plus drain. Terminates in isolated communication junction box of the Surface Box.

MOUNTING:

- **Fixture:** Infinity Knuckle provided with ½" NPSM hinge stem to secure the fixture directly into a ½" NPT threaded opening in Surface Box.
- **Surface Box:** Two independent knockout holes suitable for ¼-20 mount bolts (bolts by others)
- **Concrete Pour Mask (CPM):** included for recessed mounting of surface box in concrete.

CERTIFICATION:

UL wet location listed.

DRIVER:

4 channel DMX512-A/RDM compatible driver 12 digit UID number.

Driver is factory set to start Channel 1:

Channel 1 – Red
Channel 2 – Green
Channel 3 – Blue
Channel 4 – White

The start channel can be changed during commissioning via RDM using the driver 12 digit UID number.


LIGHT DISTRIBUTION [WHITE]:

Narrow Spot **NS** (23.5°) | Max. Candela: 1124
Medium Flood **MF** (36°) | Max. Candela: 1278
Wide Flood **WF** (53.5°) | Max. Candela: 875





DIMENSIONS

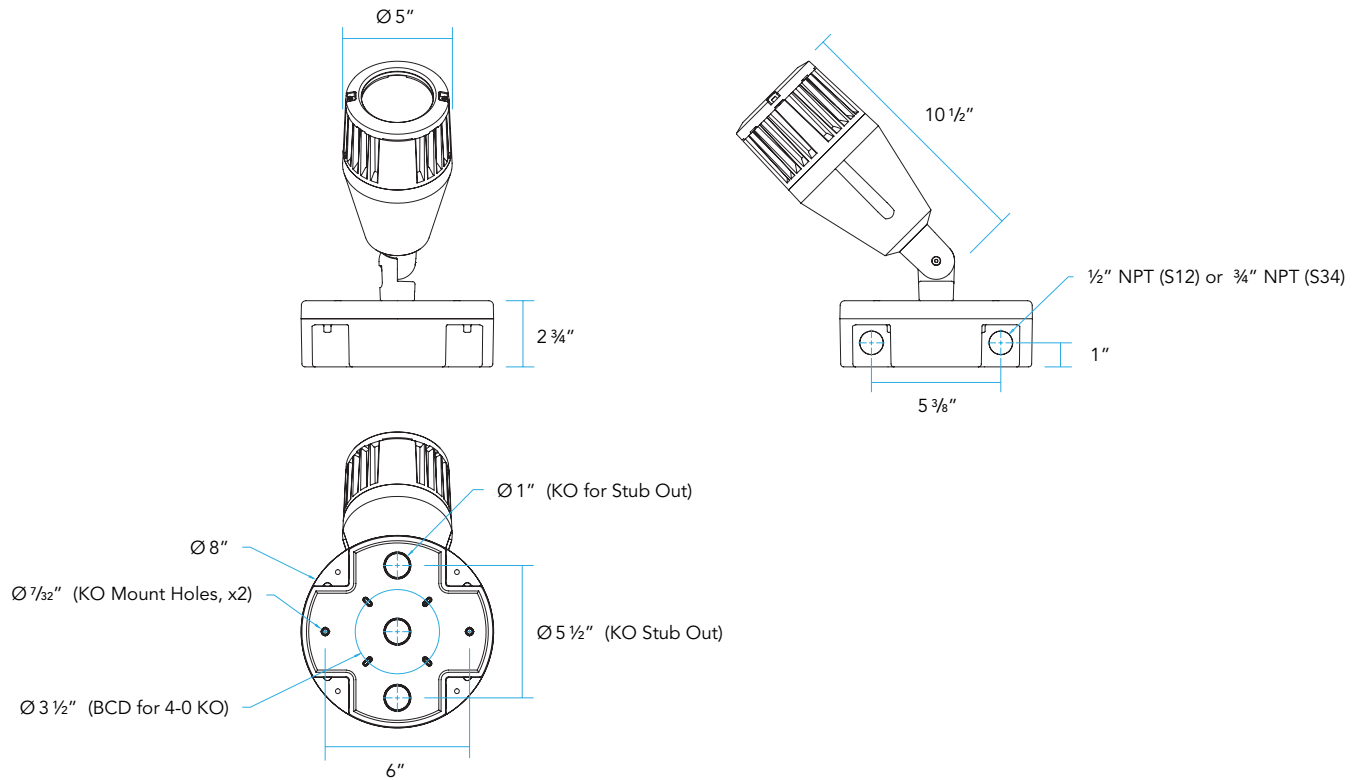

DELIVERED LUMENS SPECIFICATION

DISTRIBUTION	RED	GREEN	BLUE	WHITE
Narrow Spot 23.5° (NS)	14 Watts 90 Lumens	14 Watts 244 Lumens	14 Watts 42 Lumens	22 Watts 310 Lumens
Medium Flood 36° (MF)	14 Watts 222 Lumens	13 Watts 495 Lumens	13 Watts 108 Lumens	22 Watts 677 Lumens
Wide Flood 53.5° (WF)	14 Watts 244 Lumens	14 Watts 501 Lumens	14 Watts 123 Lumens	22 Watts 727 Lumens





CHROMATICITY

COLOR TEMPERATURE WHITE [W]:
2200K – 6000K CCT

RED WAVELENGTH [R]:
619nm – 625nm

GREEN WAVELENGTH [G]:
520nm – 530nm

BLUE WAVELENGTH [B]:
465nm – 475nm

LED MODEL:
Lumileds LUXEON C RGBW

- R** Red Wavelength Range
- G** Green Wavelength Range
- B** Blue Wavelength Range
- W** White Color Temperature Range
- A** Combined RGB Visible Color Range

