



MODEL 1057 | Specification Sheet
Commercial Series • Floodlight • LED

TYPE: MODEL:
PROJECT:

PRODUCT FEATURES



Wattage	20 – 57 W
Voltage	120 – 277 VAC
Lumens	1613 – 5778 Delivered Lumens
Distribution	NEMA type [H x V]: 2x2 (VNS), 2x2 (NS), 4x4 (MF), 6x6 (WF)
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI	80 CRI min.
Dimming	0-10V or Phase Cut (TRIAC/ELV-120VAC only) available
Driver	Multi-Volt 120-277VAC with tri-modal dimming capabilities
Dimensions	8 ⁵ / ₈ " W x 10 ¹⁵ / ₃₂ " D x 7" DIA

ORDERING INFORMATION

EXAMPLE: 1057-GM-MF-27-D-MV-PCT-FS

MODEL FINISH DISTRIBUTION COLOR TEMP LUMENS VOLTAGE DIMMING ACCESSORIES
1057 MV

MODEL	FINISH	DISTRIBUTION	COLOR TEMP	DELIVERED LUMENS	VOLTAGE	DIMMING	ACCESSORIES
1057	B Black	VNS Very Narrow Spot	27 2700K	A 1685 Lumens	MV Multi Volt	ND Non Dimming	BD Barn Doors
	Z Architectural Bronze		50 5000K				
	DZ Dark Bronze						
	GT Granite						
	W White		30 3000K	A 1685 Lumens			
	BR Architectural Brick		35 3500K	B 2396 Lumens			
	LZ Light Bronze	40 4000K	C 2720 Lumens				
	SB Special Bronze	NS Narrow Spot	27 2700K	A 1603-1835 Lumens	010 0-10V	PCT Phase Cut (D, E, F Delivered Lumen Packages only)	HS Half Light Shield
	GG Glossy Gray		50 5000K	B 2214-2589 Lumens			
	R Rust	MF Medium Flood		C 2748-2825 Lumens			DF Diffuse Filter
	HG Hunter Green						
	WB Weathered Bronze		WF Wide Flood	30 3000K	A 1603-1835 Lumens		
	WI Weathered Iron			35 3500K	B 2214-2589 Lumens		
	GM Graphite Metallic		40 4000K	C 2748-2825 Lumens			LSFH Linear Spread Filter Horizontal LSFV Linear Spread Filter Vertical
	G Verde			D 3892-4218 Lumens			
	P Pewter			E 4241-4597 Lumens			
M Mocha			F 4796-5778 Lumens				
OF Olde Finish							



PROFESSIONAL
OUTDOOR LIGHTING

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING:

Die-cast A360 aluminum. Optic and driver compartment environmentally sealed. Housing aiming achieved via a heavy aluminum yoke strap and locked in position with stainless steel lock washers and nuts. Locking fasteners are covered with decorative die-cast aluminum end caps.

DOOR:

Die-cast A360 aluminum. Stainless steel fasteners. Door is designed to shed water from the lens surface.

FINISH:

Powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

LENS:

3/8" thick tempered and beveled clear glass.

REFLECTOR:

Specular, semi-specular, or White Optic coated spun reflectors, anodized for maximum performance. Very Narrow Spot optic incorporates an additional internal source shield to eliminate unwanted glare outside the beam pattern.

LED:

Performance COB LEDs powered from 450mA-1400mA.
1613 – 5778 Lumens delivered.
20 – 57 Watts.

COLOR TEMPERATURE:

2700K, 3000K, 3500K, 4000K or 5000K CCT White.

COLOR RENDERING:

80 CRI minimum

ACCESSORIES:

Barn Doors, Full Shield, Half Shield, Diffuse Filter and Linear Spread Filter available.

WIRING:

- 18/3 SEOWW outdoor rated waterproof cable [for Non-dimmable and Phase Cut (TRIAC/ELV-120VAC only) options]
- 18/5 SJTOW outdoor rated waterproof cable [for 0-10V dimming option]

Cable exits fixture housing through a liquid tight cable fitting.

MOUNTING:

Yoke provided with 1/2 NPSM stainless Cord Seal Mount to secure the yoke strap directly into a 1/2-14 NPT threaded opening. See the Vista website for additional Mounts and Accessories.

CERTIFICATIONS | STANDARDS | COMPLIANCE:

- UL Certified for wet locations (USA & Canada) | (UL)
- Ingress Protection Rating: **IP66**
- Buy American Act (**BAA**)
- Build America, Buy America Act (**BABA**)

OPTICS/AIMING:

NEMA defined floodlight optics.
Housing aiming achieved via an aluminum yoke strap.


DRIVER:

Multi-Volt **MV** 120V-277V equipped with tri-modal dimming capabilities.
Start up/Operating Temperature: -10°C to +50°C.
Non-dimmable, 0-10V and Phase Cut (TRIAC/ELV-120VAC only) options available.

LIGHT DISTRIBUTION:

Very Narrow Spot **VNS** (NEMA 2H x 2V), Narrow Spot **NS** (NEMA 2H x 2V), Medium Flood **MF** (NEMA 5H x 5V), Wide Flood **WF** (NEMA 6H x 6V)

DIMENSIONS

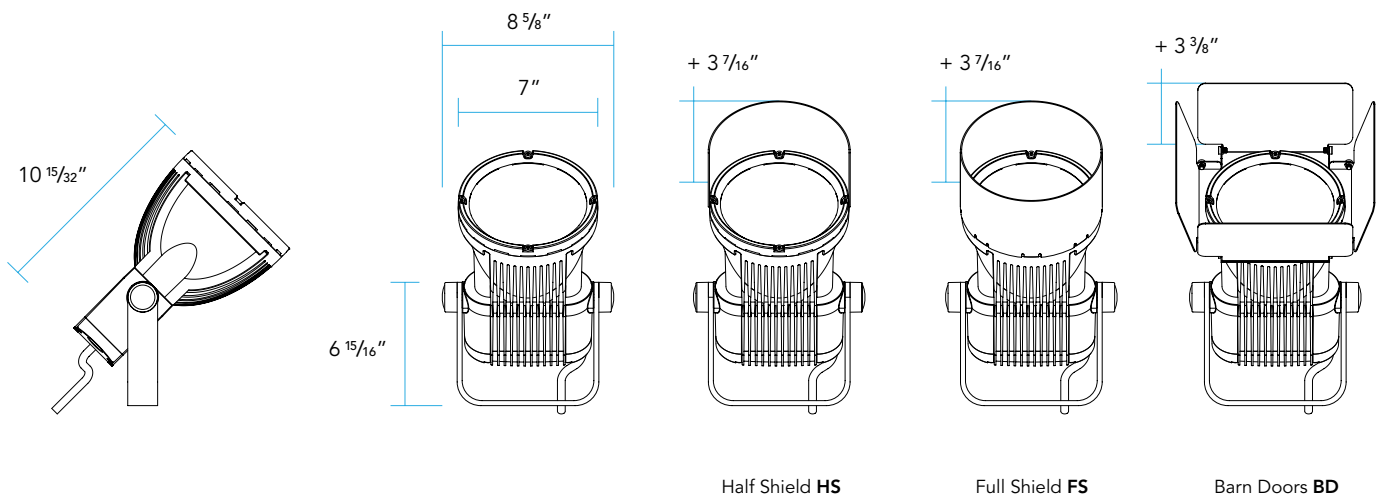



DELIVERED LUMENS

LUMEN PACKAGE	VNS	NS	MF	WF
A	38 Watts 1685 Lumens	18 Watts 1835 Lumens	18 Watts 1603 Lumens	18 Watts 1613 Lumens
B	47 Watts 2396 Lumens	28 Watts 2589 Lumens	28 Watts 2214 Lumens	28 Watts 2263 Lumens
C	57 Watts 2720 Lumens	43 Watts 2825 Lumens	38 Watts 2748 Lumens	38 Watts 2775 Lumens
D		42 Watts 4218 Lumens	42 Watts 3892 Lumens	42 Watts 3928 Lumens
E		47 Watts 4597 Lumens	47 Watts 4241 Lumens	47 Watts 4260 Lumens
F		57 Watts 5778 Lumens	57 Watts 4796 Lumens	56 Watts 4819 Lumens

