



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES FLOOD REPORT

PHOTOMETRIC FILENAME : L1123105101.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L1123105101
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUEDATE] 2/5/2024
[MANUFAC] USTE dba Vista Professional Outdoor Lighting
[LUMCAT] 1057-MF-RGBW-(W)
[LUMINAIRE] 1057 (Flood), Medium Flood, White output
[BALLASTCAT] eldoLED PW50S-M4Z0X1, QTY:1
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT]
[TEST PROCEDURE] IESNA:LM-79-19

Note: Candela values converted from Type-C to Type-B

CHARACTERISTICS


NEMA Type	5 H x 5 V
Maximum Candela	2566
Maximum Candela Angle	0H 0V
Horizontal Beam Angle (50%)	50.6
Vertical Beam Angle (50%)	50.6
Horizontal Field Angle (10%)	76.1
Vertical Field Angle (10%)	76.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1139
Beam Efficiency	N.A.
Field Lumens	1595
Field Efficiency	N.A.
Spill Lumens	227
Luminaire Lumens	1822
Total Efficiency	N.A.
Total Luminaire Watts	44.22
Ballast Factor	1.00

IES FLOOD REPORT
PHOTOMETRIC FILENAME : L1123105101.IES

AXIAL CANDELA


DEG.	HOR.	DEG.	VERT.
90	0	90	0
85	14	85	14
75	16	75	16
65	23	65	23
55	43	55	43
47.5	95	47.5	95
42.5	160	42.5	160
37.5	269	37.5	269
33	487	33	487
29	834	29	834
25.5	1262	25.5	1262
22.5	1558	22.5	1558
19.5	1797	19.5	1797
17	1962	17	1962
15	2075	15	2075
13	2167	13	2167
11	2242	11	2242
9	2308	9	2308
7	2368	7	2368
5	2438	5	2438
3	2506	3	2506
1	2554	1	2554
0	2566	0	2566
-1	2554	-1	2554
-3	2506	-3	2506
-5	2438	-5	2438
-7	2368	-7	2368
-9	2308	-9	2308
-11	2242	-11	2242
-13	2167	-13	2167
-15	2075	-15	2075
-17	1962	-17	1962
-19.5	1797	-19.5	1797
-22.5	1558	-22.5	1558
-25.5	1262	-25.5	1262
-29	834	-29	834
-33	487	-33	487
-37.5	269	-37.5	269
-42.5	160	-42.5	160
-47.5	95	-47.5	95
-55	43	-55	43
-65	23	-65	23
-75	16	-75	16
-85	14	-85	14
-90	0	-90	0

AXIAL CANDELA DISPLAY

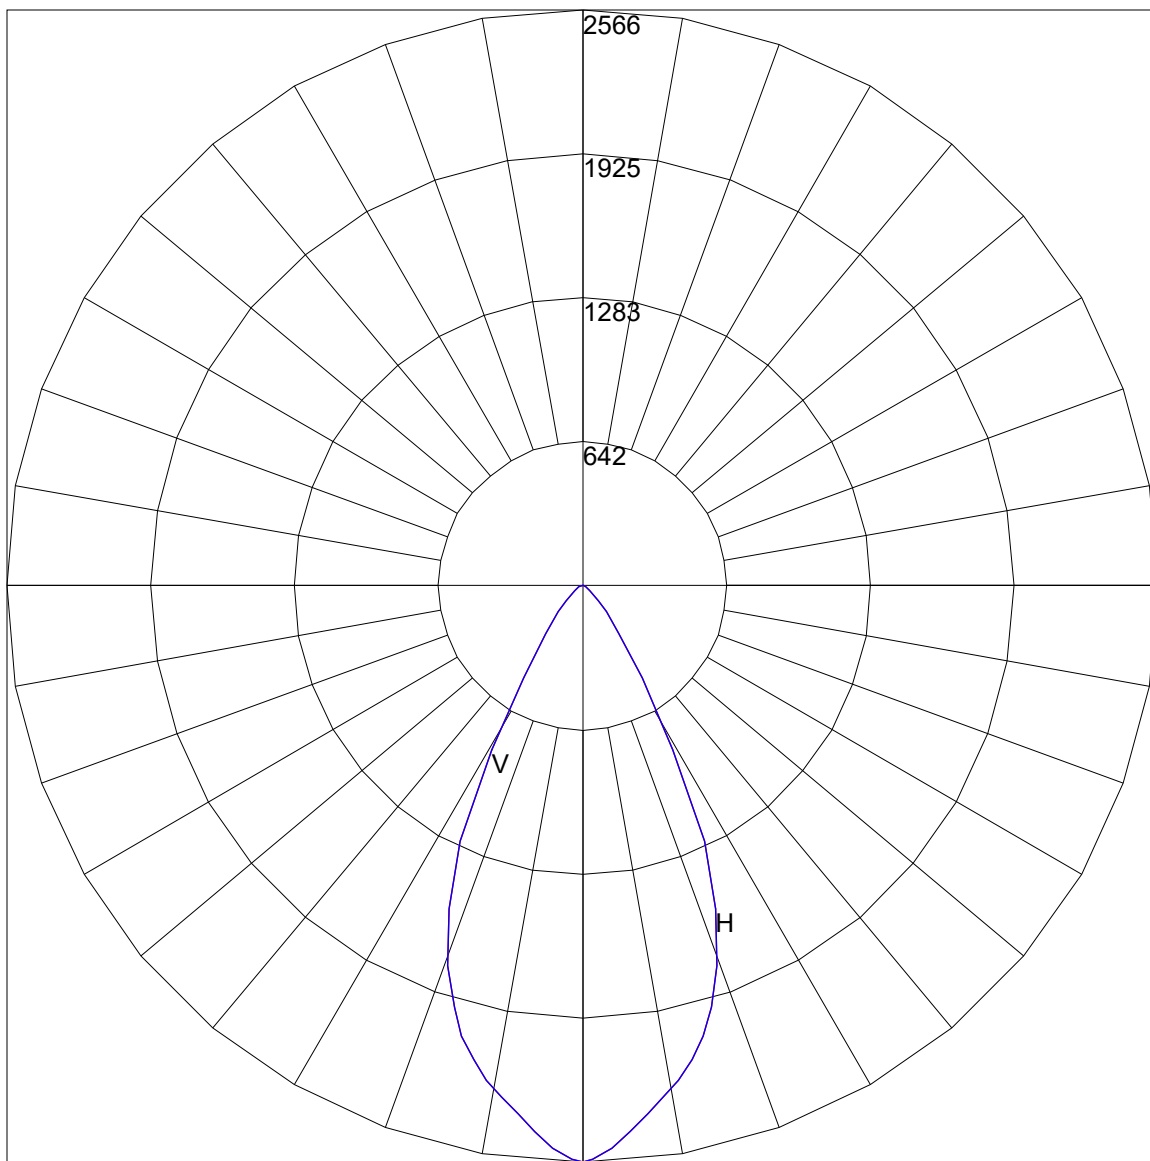

Maximum Candela = 2566 Located At Horizontal Angle = 0, Vertical Angle = 0
H - Horizontal Axial Candela
V - Vertical Axial Candela

ISOCANDELA CURVES

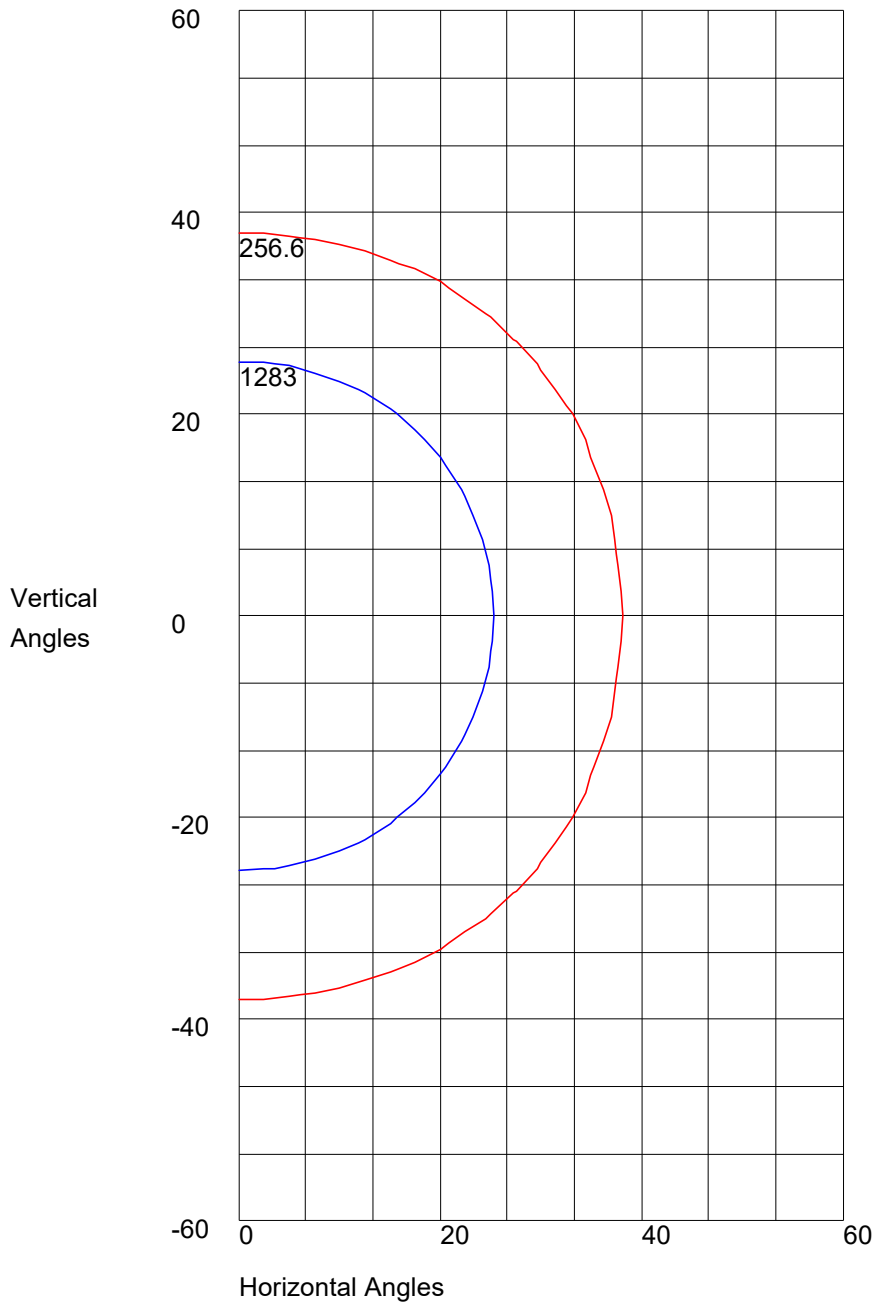

Maximum Candela = 2566 Located At Horizontal Angle = 0, Vertical Angle = 0
50% Maximum Candela = 1283
10% Maximum Candela = 256.6



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L1123105101



Report No: L1123105101

Issue Date: 2/5/2024

Report Prepared For: USTE dba Vista Professional Outdoor Lighting
1625 Surveyor Ave., Simi Valley CA 93063

Reference:N/A

Amendment:N/A

Model Number: 1057-MF-RGBW-(W)

Test: Photometric/Colorimetric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:

IESNA LM79: 2019 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2017 Specification of the Chromaticity of Solid State Lighting Products

ANSI C82.77-10:2014: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Date of Tests: 2/2/24

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	4/7/25
HP Power Supply	6032A	PS-DC05-S2	--
Fluke Digital Thermometer	52K/J	MT-TP05	5/24/25
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	USTE dba Vista Professional Outdoor Lighting
Model Number:	1057-MF-RGBW-(W)
Driver Model Number:	eldoLED PW50S-M4Z0X1, QTY:1

Test Summary

Total Lumens:	1822.00
Efficacy:	41.20
Color Redering Index:	80.1
Correlated Color Temperature:	3210
Input Voltage (VAC/60Hz):	119.98
Input Current (Amp):	0.3707
Input Power (W):	44.22
Input Power Factor:	0.9943
Current ATHD (%):	44.2%


Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:40
Total Operating Time (Hours):	1:15



FIG. 1 LUMINAIRE

Colorimetry Test Results

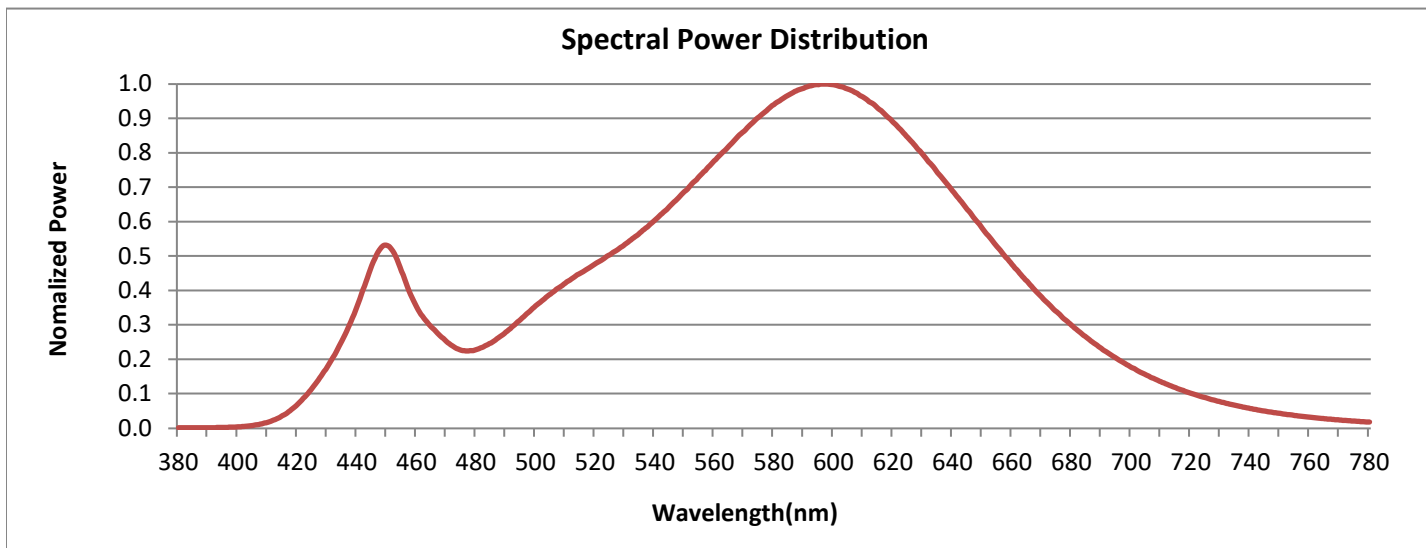


CRI & CCT

x	0.4236
y	0.4007
u'	0.2434
v'	0.5181
CRI	80.10
CCT	3210
Duv	0.00068

R Values

R1	77.07
R2	87.88
R3	96.18
R4	77.47
R5	77.53
R6	84.33
R7	83.03
R8	57.65
R9	0.78
R10	72.46
R11	74.59
R12	67.99
R13	79.17
R14	97.90
R15	70.69

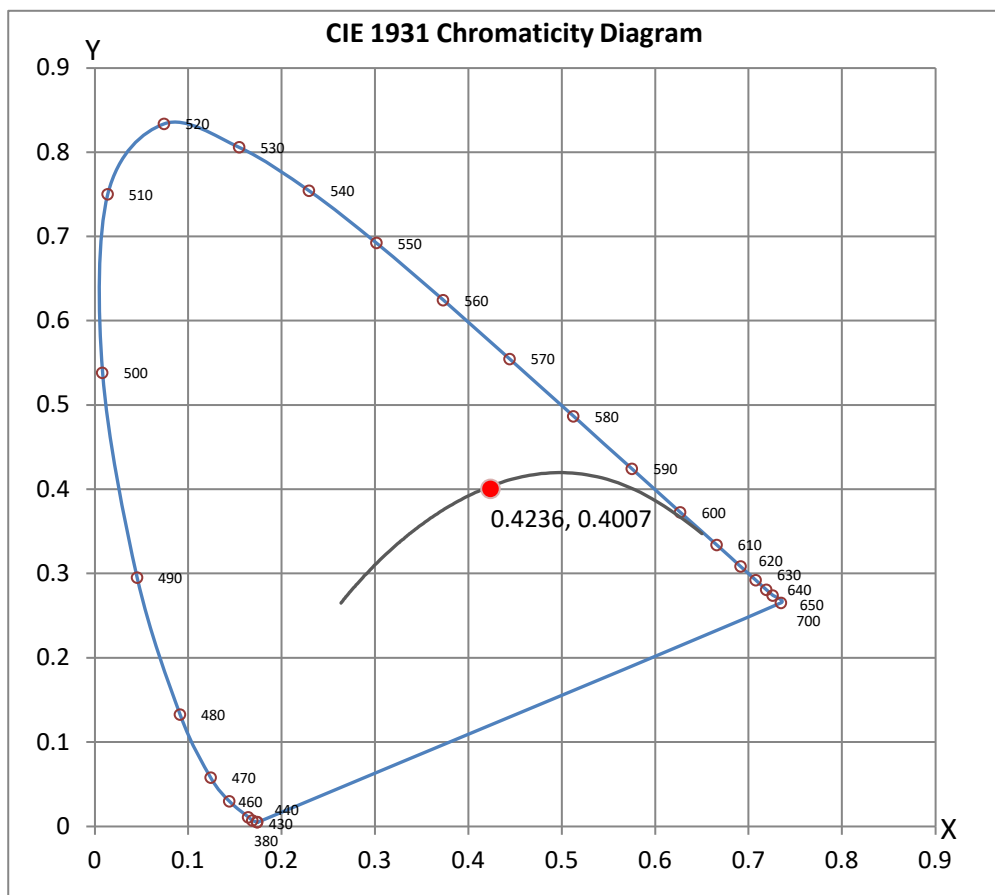



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L1123105101



Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

The results related only to the samples as received and tested. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government.

Report Prepared by : JG

Test Report Reviewed by:

Steve Kang
Quality Assurance

**Attached are photometric data reports.*