



MODEL 2521 | Specification Sheet
Commercial Series • Low Voltage • Up / Accent / Downlight

TYPE: MODEL:
PROJECT:

PRODUCT FEATURES



Wattage	4.5 W or 5.5 W
Voltage	9 – 15 VAC
Lumens	295 or 389 Lumens
Lamp Type	MR-16 LED
Housing	Aluminum, Brass or Copper
Dimensions	2 ½" DIA x 6 ½" H x 4 ½" D

ORDERING INFORMATION

EXAMPLE: **WR-2521-B-4.5-W-36-FR**

CATEGORY	MODEL	FINISH	LED	ACCESSORIES
WR	2521			

CATEGORY	MODEL	FINISH	LED	ACCESSORIES	
WR Wall-Mount	2521	B Black	R Rust	4.5-W-15 4.5 Watts Warm 15° Narrow Spot	FR Frosted Lens
		Z Architectural Bronze	HG Hunter Green	4.5-W-25 4.5 Watts Warm 25° Spot	BL Flat Cool Blue Lens
		DZ Dark Bronze	WB Weathered Bronze	4.5-W-36 4.5 Watts Warm 36° Flood	SL Flat Spread Lens
		GT Granite	WI Weathered Iron	4.5-W-60 4.5 Watts Warm 60° Wide Flood	DBL Flat Dark Blue Lens
		W White	GM Graphite Metallic	5.5-W-15 5.5 Watts Warm 15° Narrow Spot	GL Flat Dark Green Lens
		BR Architectural Brick	G Verde	5.5-W-25 5.5 Watts Warm 25° Spot	RL Flat Red Lens
		LZ Light Bronze	P Pewter	5.5-W-36 5.5 Watts Warm 36° Flood	YL Flat Amber Lens
		SB Special Bronze	M Mocha	5.5-W-60 5.5 Watts Warm 60° Wide Flood	HL Honeycomb louver
		GG Glossy Gray	OF Olde Finish	NL No Lamp	MB Adjustable Mounting Bracket
		BSN Natural Brass	CSN Natural Copper		
		BSO Olde Brass	SS Stainless Steel		



**PROFESSIONAL
OUTDOOR LIGHTING**

www.VistaPro.com • email@vistapro.com • Fax: (888) 670-VISTA (8478)
1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATIONS

HOUSING CONSTRUCTION:

Available in Aluminum, Brass or Stainless Steel.

FINISH:

Aluminum Housing available with Powder coat finish in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

LENS:

Clear, tempered glass lens.
Optical effect lenses are available.

MOUNTING:

Fixed wall mount assembly.
Adjustable mounting bracket available.

FASTENERS/INSERTS:

All fasteners are stainless steel.

WIRING:

Prewired with a 12" pigtail of 18-2 SPT1 UV resistant cable and watertight connectors.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

LED:

MR-16 LED Lamp.
295 or 389 Lumens.
4.5 or 5.5 Watts.



LIGHT DISTRIBUTION:

Very Narrow Spot **15** (15°)
Narrow Spot **25** (25°)
Medium Flood **36** (36°)
Wide Flood **60** (60°)

ELECTRICAL:

Input voltage range 9 - 15 VAC.
Low voltage transformer required to operate (sold separately).

DIMENSIONS

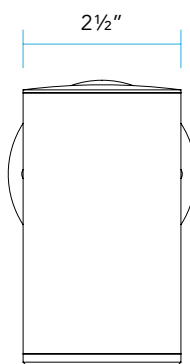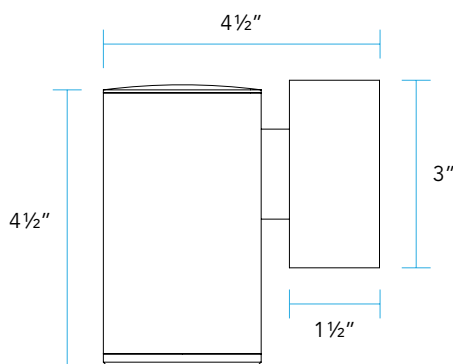

OPTIONAL
ADJUSTABLE MOUNTING BRACKET

