

INSTALLATION INSTRUCTIONS

WARNING: Luminaire junction box fitting must be installed and grounded in accordance with the National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and may result in serious injury and or damage to the luminaire junction box.

NOTE: Always use UL Listed wire connectors for connections (by others).

NOTE: Save these instructions for future reference.


LUMINAIRE JUNCTION BOX IS UL RECOGNIZED FOR ABOVE GRADE INSTALLATION ONLY.

TREE MOUNT JUNCTION BOX INSTALLATION:

- Place Tree Mount Box at the desired location on tree **with mounting hub always at top**.
 - Using a drill, mark the pilot holes by inserting the drill bit through each mounting hole of the junction box.
 - Drill pilot holes to approximately 1" depth to ease installation of lag bolts (provided).
 - Thread one hex nut (provided) on each lag bolt. Insert lag bolts (wood screw side in) in pilot holes and tighten using a 7/16 wrench.
 - Place box on tree lining up mounting holes to lag bolts.
 - Install remaining two (2) hex nuts on lag bolts to lock in place.
- NOTE:** Hex nuts may be adjusted to accommodate future tree growth as well as angle adjustment of junction box.
- To prevent electrical shock, disconnect transformer from electrical supply before service.
 - Install liquid tight connector (provided) in bottom 1/2" UL Listed NPT fitting.
 - Loosen nut on liquid tight connector and insert main supply cable to desired length.
 - Tighten nut on liquid tight connector to secure wire.
 - Thread luminaire into 1/2" NPT fitting and secure with allen screw (provided) at desired location.
 - Using the silicone filled safety connectors (provided), make connections and insert wires into box.
 - Secure front cover using gasket (provided) and two (2) phillips head screws (provided).
 - Supply power to the junction box and check for proper operation.

TOOLS REQUIRED FOR INSTALLATION:

- Wire strippers
- Phillips head screwdriver
- 7/16 Wrench
- 1/8 Allen Wrench
- Drill
- 5/32 Drill Bit

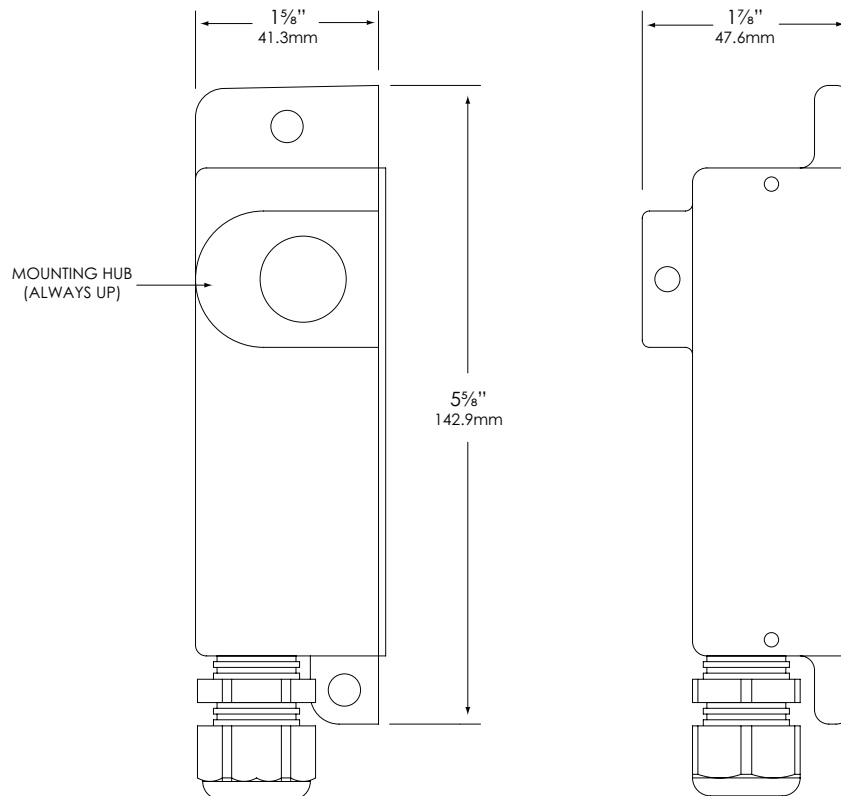

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.