

SPECIFICATION SHEET

_	
IVIDA	
1 ype	
<i>-</i> 1	

Model:

Project:

MODEL 1096 Architectural Series • Up & Accent

FIXTURE SPECIFICATIONS:

LAMP TYPE:

T6 & T4 – Metal Halide. 70W Max. Lamp not included with fixture, order separately. HID lamps require a ballast.

HOUSING:

Die-cast, copper-free aluminum.

SHROUD:

Die-cast, copper-free aluminum fitted to housing with a C-curved cross-section gasket surrounding the edge of the lens to provide a superior dual weather-tight seal.

FINISH:

Available in Black, Architectural Bronze, Light Bronze, Dark Bronze, Verde, Pewter, Architectural Brick, Granite, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron & White.

SOCKET/LAMP HOLDER:

Top grade ceramic, 4KV pulse rated socket. Available in 70W & 39W -T6 G12 base, 70W & 39W-T4 G8.5 base, and 20W-T4 GU6.5 base.

LENS:

Clear, tempered, shock and heat resistant, soda-lime glass lens - crowned to promote water runoff. Optical effect lenses are available.

REFLECTOR:

Fixed spot, flood, and wide flood reflector, mechanically formed with a polished semispecular finish for even beam control.

MOUNTING:

Infinity Knuckle (IK) - Die-cast, copper-free aluminum with stainless steel stem. A fully sealed spherical grommet allows infinite adjustment capabilities.

FASTENERS:

All fasteners are stainless steel.

WIRING:


Prewired with 200°C-rated wire along with a grounded lead.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards. This luminaire has an ingress protection rating of IP65 for protection against detrimental dust intrusion as well as penetration of water by water jet from all directions.

All Vista luminaires are MADE IN THE U.S.A.

DIMENSIONS:

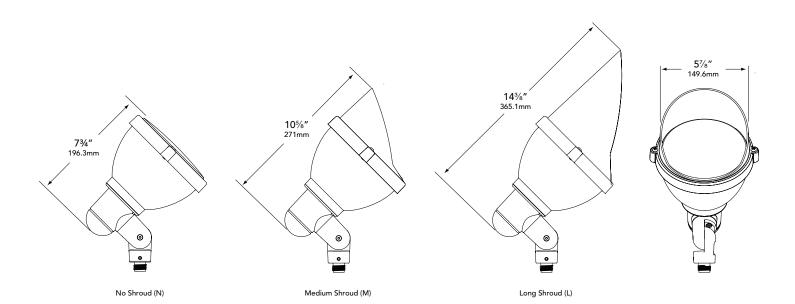

NOTE: FIXTURE SHOWN WITH INFINITY KNUCKLE





SPECIFICATION SHEET

MODEL 1096 Architectural Series • Up & Accent Lights

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: 1096-B-MF-G12-70-CX-M-HL

MODEL	FINISH	DISTRIBUTION	BASE	WATTS	LENS	SHROUD	ACCESSORIES
1096	B - Black Z - Architectural Bronze DZ - Dark Bronze LZ - Light Bronze C - Verde P - Pewter BR - Architectural Brick GT - Granite TC - Terracotta R - Rust HG - Hunter Green M - Mocha WB - Weathered Bronze WI - Weathered Iron	SP - Spot MF - Medium Flood WF - Wide Flood	G12 G8.5	70 39 20	CX - Crowned Clear CBL - Crowned Cool Blue CFR - Crowned Frosted	N - No Shroud M - Medium Shroud L - Long Shroud	HL - Honeycomb Louver ISS - Internal Source Shield (SP Only)

Fixtures shipped with no lamp.

Fixtures shipped with specified mounting hardware.