



**PROFESSIONAL  
OUTDOOR LIGHTING**

Type: \_\_\_\_\_

Model: \_\_\_\_\_

Project: \_\_\_\_\_

## SPECIFICATION SHEET

### MODEL 1409 Architectural Series • Bollards & Beacons

#### FIXTURE SPECIFICATIONS:

**LAMP TYPE:**

ED-17- Metal Halide or High Pressure Sodium. 70W maximum. Ballast is integrated into fixture. Please specify ballast type from the fixture ordering information chart. Lamp not included with fixture, order separately.

**HOUSING:**

Die-cast, copper-free aluminum.

**POST:**

5" diameter, heavy gauge, extruded aluminum (1/8" wall thickness).

**FINISH:**

Durable powder coat finish available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish. Custom Powder coat finishes available on request.

**SOCKET/LAMP HOLDER:**

Compact fluorescent thermoplastic socket.

**BALLAST:**

High-power factor ballast rated for -20°F starting, 120-volt standard.

**LENS:**

Clear, frosted or prismatic threaded and gasketed, tempered glass vapor globe.

**MOUNTING:**

Aluminum mounting base and foundation anchor rods included.

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**


Prewired with 200°C-rated wire along with a grounded lead.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

#### DIMENSIONS:

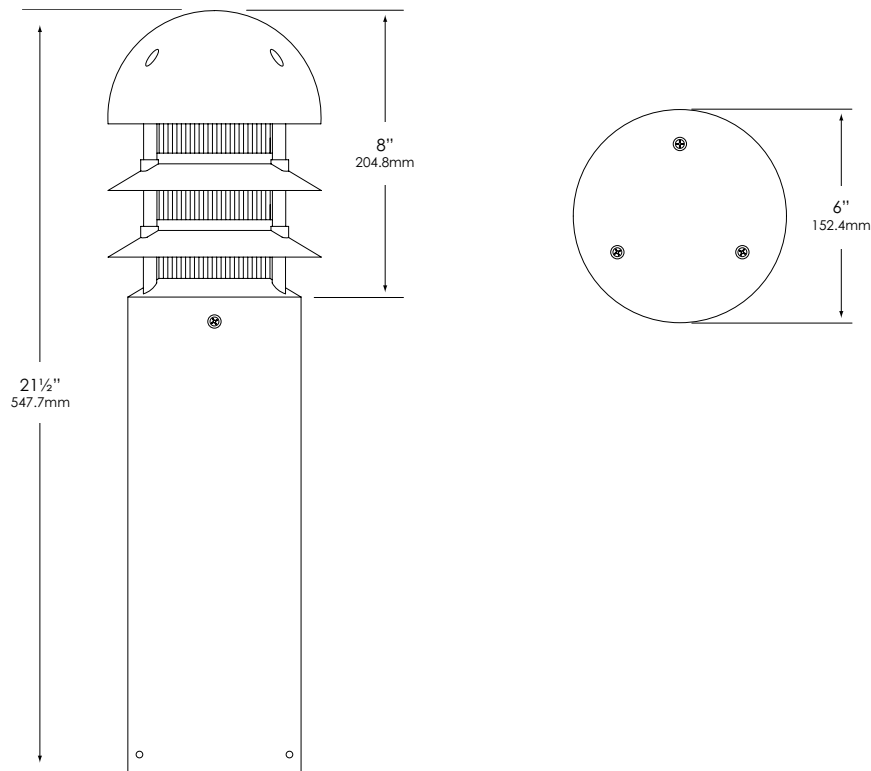

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# SPECIFICATION SHEET

## MODEL 1409 Architectural Series • Bollards & Beacons

### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: 1409-B-FR-70-MH-120**

MODEL	FINISH	LENS	INTEGRATED HID BALLAST		
			Wattage	Ballast	Voltage
1409	Standard	<b>CR</b> – Clear lens <b>FR</b> – Frosted lens <b>PR</b> – Prismatic lens	<b>35*</b> <b>50</b> <b>70</b>	<b>MH</b> – Metal Halide	<b>120</b> <b>208</b> <b>240</b> <b>277</b> <b>MT</b> – Multi-Tap
	<b>B</b> – Black <b>Z</b> – Architectural Bronze <b>DZ</b> – Dark Bronze <b>GT</b> – Granite <b>W</b> – White				
	Premium				
	<b>BR</b> – Architectural Brick <b>LZ</b> – Light Bronze <b>SB</b> – Special Bronze <b>GG</b> – Glossy Gray <b>R</b> – Rust <b>HG</b> – Hunter Green <b>WB</b> – Weathered Bronze <b>WI</b> – Weathered Iron <b>GM</b> – Graphite Metallic		<b>35</b> <b>50</b> <b>70</b>	<b>HPS</b> – High Pressure Sodium	<b>120</b> <b>208</b> <b>240</b> <b>277</b> <b>MT</b> – Multi-Tap
	Hand Finished				
	<b>G</b> – Verde <b>P</b> – Pewter <b>M</b> – Mocha <b>OF</b> – Olde Finish				

Lamp not included with fixture, order separately. - For available lamps, see Lamp Guide, Vista catalog.  
 \*35-watt MH ballasts available in 120 or 277 volts only.