

SPECIFICATION SHEET

Type:

Model:

Project:

MODEL 1427 Architectural Series • Bollards & Beacons

FIXTURE SPECIFICATIONS:

LAMP TYPE:

ED-17- Metal Halide or High Pressure Sodium. 70W Maximum. Ballast is integrated into fixture. Please specify ballast type from the fixture ordering information chart. Lamp not included with fixture, order separately.

HOUSING:

Die-cast, copper-free aluminum.

POST:

 $5^{\prime\prime}$ diameter, heavy gauge, extruded aluminum (1/8 $^{\prime\prime}$ wall thickness).

FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

SOCKET/LAMP HOLDER:

Compact fluorescent thermoplastic socket.

BALLAST:

High-power factor ballast rated for -20°F starting, 120-volt standard. **LENS:**

Clear, frosted or prismatic threaded and gasketed, tempered glass vapor globe.

MOUNTING:

Aluminum mounting base and foundation anchor rods included.

FASTENERS:

All fasteners are stainless steel.

WIRING:


Prewired with 200°C-rated wire along with a grounded lead.


CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are MADE IN THE U.S.A.

DIMENSIONS:

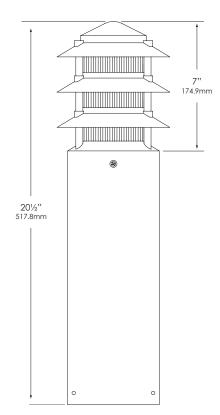





Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



SPECIFICATION SHEET

MODEL 1427 Architectural Series • Bollards & Beacons

FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

EXAMPLE: 1427-B-FR-50-MH-120

MODEL	FINISH	LENS	INTEGRATED FLUORESCENT BALLAST		
			WATTAGE	BALLAST	VOLTAGE
1427	B- Black G- Verde BR- Architectural Brick Z- Architectural Bronze LZ - Light Bronze DZ - Dark Bronze GT- Granite P- Pewter TC- Terracotta R- Rust HG- Hunter Green M- Mocha WB- Weathered Bronze WI- Weathered Iron W- White	CR- Clear lens FR- Frosted lens PR- Prismatic lens	35*, 50, 70 50, 70 35, 50, 70	MH- Metal Halide HPS- High Pressure Sodium	120 208 240 277 MT- Multi-tap

Lamp not included with fixture, order separately. - For available lamps, see Lamp Guide, Vista catalog. *35-watt MH ballasts available in 120 or 277 volts only.